

October 2005
U.S. Army Medical Materiel Agency

The information contained in this manual was prepared by the U.S. Army Medical Materiel Agency, Materiel Acquisition Directorate, Acute Care Division, Fort Detrick, MD

This manual is still in draft form and may contain inaccuracies. To report inaccuracies or additions, please contact 301-619-4305, DSN 343-4305, or **USAMMATSD@amedd.army.mil**. Responses may also be mailed to:

Commander
U.S. Army Medical Materiel Agency
MCMR-MMO-AC
1423 Sultan Drive, Suite 100
Fort Detrick, MD 21702-5001-

NOTE: CLICK ON TITLE FOR DIRECT LINK

TABLE OF CONTENTS

SECTION NO.	<u>DEVICE</u>	<u>NSN</u>	PAGE NO.
1	Anesthesia Apparatus, Drawover	(J) 6515-01-355-6479	1
2	Automatic Tourniquet	(L) 6515-01-481-0925	7
3	Blood Fluid Warmer Thermal Angel Kit	AWAITING NSN	11
4	Blood Chemistry Analyzer, i-Stat	(J) 6630-01-496-5195	19
5	Warmer/Infuser, Blood/Fluid	(J) 6515-01-465-2059	25
6	Centrifuge	(L) 6640-01-068-9612	29
7	Defibrillator, Monitor Recorder	(J) 6515-01-515-4197	31
8	Defibrillator/Monitor	(J) 6515-01-480-9614	39
9	Electrosurgical Apparatus, Force 2	(J) 6515-01-309-6647	43
10	Fixator, Hoffman II, External	(L) 6515-01-464-0077	47
11	Fixation External Peel Pack	(L) 6515-01-463-1464	51
12	Laryngoscope Blade	(D) 6515-00-616-5052	53
13	Surgical Head Light GoodLite	(L) 6515-01-227-3563	55
14	Surgical Headlight	(L) 6230-01-520-3474	57
15	Light Surgical Field Unit	(L) 6530-01-518-9854	61
16	Monitor Vital SignsW/SPO ²	(J) 6515-01-432-2707	63
17	Monitor Patient Vital Signs W/SPO ² /WCAP	(J) 6515-01-432-2711	71
18	Nerve Stimulator, Peripheral	(J) 6515-01-397-5212	83
19	Table Operating Field	(L) 6530-01-321-5592	87
20	Otoscope & Ophthalmoscope Set	(D) 6515-00-550-7199	109
21	Oxygen Concentrator	(J) 6515-01-327-6798	111
22	Monitor Oxygen	(L) 6515-01-279-6450	113
23	Pump, Infusion, Alaris	(J) 6515-01-486-4310	117
24	Pump, Intravenous Infusion	(J) 6515-01-498-2252	119
25	Refrigerator, Solid-State, Biologicals	(J) 4110-01-451-2356	121
26	Suction Apparatus, Oropharyngeal Tracheal	(J) 6515-01-435-5350	123
27	Thermometer, Tympanic	(L) 6515-01-440-5976	127
28	<u>Ultrasound, Portable 180 Sonosite</u>	(J) 6525-01-503-7182	129
29	Ventilator Volume Portable	(J) 6530-01-464-0267	139
30	View box, RH Blood Typing	(L) 6630-01-491-4705	143
31	Warming Unit, Bair Hugger	(L) 6530-01-463-6823	145
32	Blanket Hypothermia, Chillbuster	(L) 6515-01-500-6087	149

ANESTHESIA APPARATUS, PORTABLE TOC

DATEX-OHMEDA MODEL: DRAWOVER

Manufacturer's PHONE: (608) 221-1551 FAX: (608) 221-4383

Website: http://www.datexohmeda.com

AAC "W" ITEM: 6515-01-289-9820 AAC "J" ITEM: 6515-01-355-6479

UA's:0267, 2267, M301

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$6146.08

System Description: Simple, rugged, lightweight, draw over anesthesia device with a calibrated, temperature-compensated, flow-over (with wick), low resistance vaporizer. The vaporizer is designed for use in non-rebreathing type circuits and is classified as "agent non-specific".

Tests performed: All anesthesia cases with a single agent vaporizer.





DRAWOVER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	15"
	Width	9"
	Depth	9"
Weight	5 lb	
Operating Temperature		
	65°F-95°F	



DRAWOVER CONSUMABLES

NSN	NOTES	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refri g Y/N	CONU S Ship Time, weeks
6505014437083	Order Prior to Deployment	ISOFLURANE USP 100ML BOTTLE 6 BOTTLES PER PACKAGE	NDC00074- 3292-01	1	6∖PG	\$121.00	\$121.00	ABBOTT LABS	24 MONT HS		2
6515013531068	Included W/NSN	Thermal vent 600 HME Filter	580011	1	50 PG	\$167.99	\$167.99	Sims Portex	Indef	N	2
		HUMIDIFIER HCH/HME 300- 1200ML BACT/VIRAL FILTER			20			Hudson			
6515015227134	Included W/NSN		19932	1	BX	\$185.05	\$185.05	RCI	Indef	N	2

DRAWOVER ACCESSORIES

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
7610015220865	Included W/NSN	Operation and Maintenance Manual	1101-0001- 000	01	01	\$3.85	\$3.85	Datex- Ohmeda	Indef	N/A	2
6515015244402	Included W/NSN	Adult ventilation valve 1600 ml	8701-00	01	EA	\$135.95	\$135.95	Laerdal	Indef	N	2
6515010519137	Included W/NSN	Intake valve	5104-00	01	EA	\$35.50	\$35.50	Laerdal	Indef	N	2
6515010763801	Included W/NSN	Non-rebreather patient valve IV	5602-00	1	EA	\$50.00	\$50.00	Laerdal	Indef	N	2
6515015244400	Included W/NSN	Expiration diverter 30 mm	8505-00	1	EA	\$22.50	\$22.50	Laerdal	Indef	N	2
6515015244401	Included W/NSN	Scavenging connector	8510-00	1	EA	\$14.25	\$14.25	Laerdal	Indef	N	2
6515013209247	Included W/NSN	Manometer connector	8509-00	1	EA	\$9.50	\$9.50	Laerdal	Indef	N	2
6515015242828	Included W/NSN	Extension tube 28 cm	8710-00	1	EA	\$27.50	\$27.50	Laerdal	Indef	N	2
6515015255558	Included W/NSN	Child ventilation bag 500 ml	8601-00	1	EA	\$118.95	\$118.95	Laerdal	Indef	N	2
6515013120924	Included W/NSN	Non-rebreathing valve IV infant	8512-00	1	EA	\$61.75	\$61.75	Laerdal	Indef	N	2
6515 015252767	Included W/NSN	Complete breathing circuit (Kit, Drawover Vaporizer)	1101-7009- 000	1	EA	\$770.00	\$770.00	Datex- Ohmeda	Indef	N	2
4820014163658	Included W/NSN	AMBU-E2 Non-rebreathing valve	000-097- 000	1	EA	\$107.00	\$107.00	AMBU USA	Indef	N	2
6515015242839	Included W/NSN	15 mm ID x 15 mm OD adapter	H-1173	1	EA	\$15.75	\$15.75	Gary Hull Anesthes ia, Inc.		N	2

INDIVIDUAL ITEMS LOCATED IN THE 1101-7009-000 KIT NSN 6515-01-525-2767

GUIDE TO AVAILABLE COMPONENTS -Drawover Vaporizer DRAWOVER VAPORIZER BASIC ASSEMBLY* 1101-8003-000 RESERVOIR HOSE 12" & 1101-3027-000 **BAG MOUNT** 1101-3030-000 AIR INTAKE COVER* **CORRUGATED TUBE** 1101-3021-000 ADAPTOR (3 PLACES) 22mm FEMALE 1101-3028-000 CORRUGATED BREATHING CORRUGATED BREATHING HOSE 1070mm (42") HOSE 305mm (12") 1101-3026-000 1101-3027-000 **CORRUGATED TUBE** ADAPTOR 22mm MALE (3 PLACES) 1101-3029-000 AIR INLET VALVE 1101-3034-000 **EXPIRATORY** NON-RETURN VALVE 1101-3032-000 **SELF-INFLATING BAG FACE MASK** 1101-3033-000 SIZE 5: ADULT (TRANSPARENT) 1101-3031-000 "RED CAP" 1101-3035-000

AUTOMATIC TOURNIQUET TOC

ZIMMER INC. MODEL A.T.S. 1200

Manufacturer's PHONE: (305) 364-0888 ext. 745 (305) 364-0877


Website: http://www.zimmer.com

ACC "L" ITEM NSN 6515-01-481-0925

UA's:, 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$4,600.00

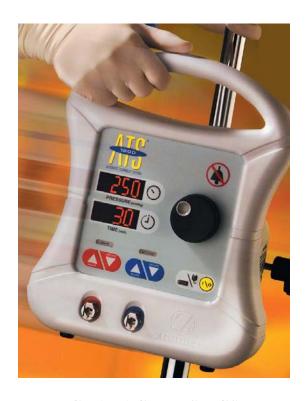

CHARACTERISTICS

Dimensions	Height , in.	12.5
	Width, in.	10.25
	Depth, in.	8.1
Weight, lb.		8
Storage Temperature		50° to 100°F
Operating Temperature		50° to 100°F
Humidity (no condensing)		10-80%
Power Requirements	53 Watts	100-220 VAC 50/60 HZ, 220/240 50 HZ, .482 amps Sealed lead acid battery pack; AUTO SWITCHING
	or made	Battery 12 vdc rechargeable sealed lead acid 2.3 amp

AUTOMATIC TOURNIQUET ACCESSORIES 7 REUSABLE CUFFS



TOURNIQUET ACCESSORIES/CONSUMABLES START-UP

NSN	NOTES	Nomenclature	QT Y	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refr ig Y/N	Time,
6515014671932	Included W/NSN	Connecting Hose Blue	1	EA	60-2790-002-00	\$52.57	\$52.57	Zimmer Inc	N	N	2
6515014671933	Included W/NSN	Connecting Hose Red	1	EA	602790001	\$52.57	\$52.57	Zimmer Inc	N	N	2
6515015232779	Included W/NSN	8 in single port, single bladder reusable cuff	1	EA	607600001	\$121.14	\$121.14	Zimmer Inc	N	N	2
6515014863148	Included W/NSN	12 in single port, single bladder reusable cuff	1	EA	607600002	\$128.00	\$128.00	Zimmer Inc	N	N	2
6515014863147	Included W/NSN	18 in single port, single bladder reusable cuff	1	EA	607600003	\$114.00	\$114.00	Zimmer Inc	N	N	2
6515014611543	Included W/NSN	24 in single port, single bladder reusable cuff	1	EA	607600004	\$162.29	\$162.29	Zimmer Inc	N	N	2
6515015230990	Included W/NSN	30 in single port, single bladder reusable cuff	1	EA	607600005	\$173.00	\$173.00	Zimmer Inc	N	N	2
6515014611545	Included W/NSN	34 in single port, single bladder reusable cuff	1	EA	607600006	\$184.00	\$184.00	Zimmer Inc	N	N	2
6515014666528	Included W/NSN	42 in single port, single bladder reusable cuff	1	EA	607600007	\$201.14	\$201.14	Zimmer Inc	N	N	2
6515015232826	Included W/NSN	Tourniquet Stand	1	EA	604022001	\$441.14	\$441.14	Zimmer Inc	N	N	2
6515015232821	Included W/NSN	Basket	1	EA	601908001	\$147.43	\$147.43	Zimmer Inc	N	N	2
7610015224222	Included W/NSN	Manual	1	EA	62172510100	N\C	N\C	Zimmer Inc	N	N	2
7610015224220	Included W/NSN	Video	1	EA	97075002100	N\C	N∖C	Zimmer Inc	N	N	2
6140015232806	Included W/NSN	Replacement Battery	1	EA	60075000002	\$121.00	\$121.00	Zimmer Inc	N	N	2

PERFORMS BEST UNDER PRESSURE

The A.T.S. 1200 Tourniquet System addresses the most important concerns in tourniquet system design, providing the features that health care facilities demand for safety, reliability, and convenience.

Low-profile cuffs stay in place without discomfort. Select reusable cuffs or disposable sterile cuffs to eliminate cross-contamination. Cuff sleeves help reduce wrinkles, pinching, and shearing of soft tissue.

Positive-locking connectors supply safer, leak-free inflation. Angled ports keep connectors clear of the surgical site.

Visual and audio alarms readily detect pressure variations. Lightweight portable unit can be mounted on an I.V. pole or placed on a table 45-minute battery backup to help ensure continuous power.

Lightweight portable unit can be mounted on an I.V. pole or placed on a table 45-minute battery backup to help ensure continuous power.

BLOOD FLUID WARMER THERMAL ANGEL

Thermal Angel Estill Medical Technologies, Inc Model TA-SK1M

Manufacturer's PHONE: (214) 561-6001 Fax: (214) 561-1930

Website: http://www.thermalangel.com

ACC "L"ITEM NSN NEW KIT ITEM

UA's: 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$451.50 PER KIT OF 5 Disposable Thermal Angel's



System Description: The Thermal Angel is an in line, battery-powered disposable, lightweight and completely portable blood and IV fluid warming device, capable of intravenous application and irrigation warming. The Thermal Angel can be used to help prevent fluid-induced hypothermia. The Thermal Angel TA-200 will strive to achieve 38°C (100.4°F) $\pm 3^{\circ}\text{C}$ at a flow rate of 2 to 150 ml/min given a fluid input temperature of 20°C (68°F) with a fully charged TA-BCE Battery.



THERMAL ANGEL UNIT TA-200 ACC "L" NSN 6515-01-500-3521

Features: • Lightweight (9 oz), in-line, disposable, portable battery-powered blood and IV fluid warmer

- No cartridges or cleaning
- Inserted below standard IV tubing, coming from the bag and before the extension set leading to the infusion site
- Will strive to achieve 38°C (100.4°F) ±3°C at a flow rate of 2 to 150 ml/min given a fluid input temperature of 20°C (68°F) with a fully charged TA-BCE Battery
- Quick setup within 30 seconds
- Warms in approximately 45 seconds
- Placed at or near the infusion site for minimal heat loss through tubing
- Failsafe to prevent overheating
- Ability to remain with patient from first contact through hospital stay
- Can be used in the field, ambulances, helicopters, ER, OR, military and other care areas
- The unit uses standard luer fittings and will accept all standard IV line sets
- Single patient use
- Heaters adjust automatically in response to changes in flow rate
- Disposable

Thermal Angel TA-200 Performance Specifications:

Output Temperature: $38^{\circ}\text{C} (100.4^{\circ}\text{F})$ Accuracy: $\pm 3^{\circ}\text{C} (5.4^{\circ}\text{F})$ Input Temperature: $20^{\circ}\text{C} (68^{\circ}\text{F})$ Input Flow Rate: 2 to 150 ml/min

Input Voltage: 12 Volts DC from a fully charged power source

Warm-up Time: Approximately 45 seconds

Thermal Angel TA-200 Performance Specifications:

Output Temperature: $38^{\circ}\text{C} (100.4^{\circ}\text{F})$ Accuracy: $\pm 3^{\circ}\text{C} (5.4^{\circ}\text{F})$ Input Temperature: $20^{\circ}\text{C} (68^{\circ}\text{F})$ Input Flow Rate: 2 to 150 ml/min

Input Voltage: 12 Volts DC from a fully charged power source

Warm-up Time: Approximately 45 seconds

Thermal Angel TA-200 Absolute Minimum and Maximum Specifications:

Minimum Maximum

Output Temperature: NA 47°C (116.6°F) failsafe fuse

Input Temperature: 4°C (39.2°F) 38°C (100.4°F)
Input Flow Rate: 0 ml/min 200 ml/min
Input Voltage: 10.5 Volts DC 13.8 Volts DC
Storage Temperature: 0°C (32°F) 40°C (104°F)

Thermal Angel TA-200 External Physical Specifications:

Length: 9.0 in. (22.86 cm)
Width: 2.8 in. (7.11 cm)
Depth: 0.95 in. (2.41 cm)
Weight: 9.2 oz. (260.82 g)

Thermal Angel TA-200 Fluid Path Specifications:

Material: Passivated 316L stainless steel tube

Tube Length: 50.25 in. (127.5 cm)
Tube Wall Thickness: 0.035 in. (.098 cm)
Tube I.D.: 0.117 in. (.30 cm)
Volume: 0.540 cu. in. (8.85 ml)

Thermal Angel TA-200 Heater Specifications:

Type: Electrical resistance, band heater

Material: 1 oz. copper

Substrate: 3 mil polyester film

Approximate Area: 17 sq. in.

Nominal Power: 216 watts @ 12 Volts DC

Thermal Angel TA-200 Controller Specifications:

Operational Voltage: 5 Volts DC

Processor: 8-bit microcontroller

Clock Rate: 8 MHz ADC Configuration: 8-bits

Sensor: NTC Thermistor mounted in fluid stream

Control Algorithm: Closed-loop PID (Proportional Integral Differential)

Sample Rate: 4.8 Ks/sec

TA-200 QUICK STEPS

Step 1: • Remove the female luer cap from the inlet end of the Thermal Angel®. • Connect IV tubing to the female luer. Tighten until resistance is met. Do not over tighten

Step 2: • Remove the male luer cap from the outlet end of the Thermal Angel®. • Connect 9 Inch IV Extension Set to the male luer. Tighten until resistance is met. Do not over tighten.

Step 3: • Connect assembled IV line to fluid source and prime the line.

Step 4: • Connect the male end of the Power Cable to the inlet end cap of the Thermal Angel®. • Connect the female end of the Power Cable to the Battery. • The green LED on the Thermal Angel® inlet end cap should display continuous illumination without blinking.

Step 5: • Connect 9 Inch IV Extension Set to IV catheter. • Engage roller clamp on IV tubing to adjust flow.



9 INCH EXTENSION SET TA-9EXT 6515-01-503-8228



BATTERY TA-BCE 6515-01-500-2858



BATTERY CHARGER TA-CAC 6515-01-500-3022



BATTERY BAG TA-CC 6515-01-500-3045



POWER CABLE TA-CDC 6515-01-500-3027

THERMAL ANGEL KIT TA-SK1M

CONSUMABLES AND ACCESSORIES

NSN	NOTES	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015003521	INCLUDED W/NSN	THERMAL ANGEL	TA-200	1	5/EA	\$65.00	\$325.00	Estill Medical Tech	N	N	2
6515015002858	INCLUDED W/NSN	Battery	TA-BCE	1	EA	\$64.38	\$64.38	Estill Medical Tech	N	N	2
6515015003022	INCLUDED W/NSN	Battery Charger	TA-CAC	1	EA	\$24.46	\$24.46	Estill Medical Tech	N	N	2
6515015003027	INCLUDED W/NSN	Power Cable	TA-CDC	1	EA	\$17.50	\$17.50	Estill Medical Tech	N	N	2
6515015003045	INCLUDED W/NSN	Battery Bag	TA-CC	1	EA	\$12.59	\$12.59	Estill Medical Tech	N	N	2
6515015038228	INCLUDED W/NSN	9" IV extension	TA-9EXT	1	5/EA	\$2.00	\$10.00	Estill Medical Tech	N	N	2

Preliminary Evaluation of Compatibility Between

Infusion Dynamics Power Infuser®

and

Estill Medical's Thermal Angel® Blood and IV Fluid Warmer (TA-200)

Testing performed by Infusion Dynamics, Inc. August 9, 2002

The Power Infuser was found to be **COMPATIBLE** with Estill Medical's Thermal Angel provided the following configuration was used:

[IV bag] - [Power Infuser] - [Thermal Angel] - [Patient]

Standard IV tubing set was connected between the IV bag and the Power Infuser. An 18" pump-to-patient IV tubing set was used between the Power Infuser and Thermal Angel and between the Thermal Angel and the 18ga. patient needle.

Flow rates in this configuration matched the rates without the warmer in the line.

Temperature of outflow fluid was 38.3°C with the pump set to

L/hr. According to the TA-200 instructions, fluid should be warmed to $38^{\circ}\text{C} \pm 3^{\circ}\text{C}$.

When the Power Infuser was set to 6L/hr. and placed in-line with the Thermal Angel warmer, the pump's OCC alarm triggered approximately 2.5 after the line at the patient end was occluded. Without the warmer in the line the OCC alarm triggers approximately 1.2 seconds after occlusion. This slightly longer time to occlusion is due to the compliance of the tubing when it is warmed.

Approximately 1-2 cc of fluid is released when the occlusion is cleared. The peak pressure during the occlusion reached 14-18 PSI (724 - 931mmHg), and settled down to approximately 9 PSI (465mmHg) after the alarm was triggered and the pump stopped. No leaks in the set or any decay in the pressure were observed in the period of several minutes that the occlusion was maintained after the pump OCC alarm triggered.

The Power Infuser was **NOT COMPATIBLE** with the Thermal Angel Warmer in this configuration:

[IV bag] - [Thermal Angel] - [Power Infuser] - [Patient]

When the Power Infuser is running at 6L/hr. and is downstream of the warmer, the occlusion alarm will not activate when the patient tubing is occluded. (Operation at the 1L/hr., 2 L/hr. and 4L/hr. settings is acceptable).

This occurs due to a more compliant system resulting from the elevated temperature in the fluid path.

A compatible set up: IV bag, pump, warmer, patient.



BLOOD CHEMISTRY ANALYZER, i-Stat

I-STAT CORP. MODEL 200 SERIES

Manufacturer's PHONE: (609) 443-4820 FAX (609) 443-9310

Website: http://www.abbott.com

AAC "W" ITEM NSN 6630-01-504-2815 AAC "J" ITEM NSN 6630-01-496-5195

UA's: 1623, 2261, 2267, 3263, M301

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$9,773.63

System Description: Point-of-use blood analyzer for the measurement of blood gases and electrolytes. Utilizes 2 to 3 drops of fresh whole blood in a disposable test cartridge that is inserted into the handheld analyzer. The cartridge self-calibrates miniaturized sensors upon insertion into the analyzer. Results are displayed in less than 2 minutes. Records and automatically stored (up to 50) for printing and/or transmission. A daily quality control of less than 60 seconds is required. Upon completion, all blood and calibrant fluid is contained within the cartridge for safe bio-hazard disposal.

Tests performed:


- 1) Glu Glucose
- 2) pH -
- $3) pCO_2$
- 4) pO_2
- 5) Bicarbonate
- 6) Total carbon dioxide
- 7) Base excess
- 8) O₂ saturatin
- 9) Sodium
- 10) Potassium
- 11) Chloride
- 12) Urea nitrogen
- 13) Hematocrit
- 14) Hemoglobin
- 15) Ionized calcium

Features

- Point-of-use capability.
- Weight reduction,
- i-STAT 18 oz).
- Battery backup (12 VDC).
- Extensive array of cartridge-based panels.2
- Small sample size 0.5 ml, I-STAT 65 μL).

NOTE: NEW SOFTWARE UPDATES ARE REQUIRED PRIOR TO EACH DEPLOYMENT.



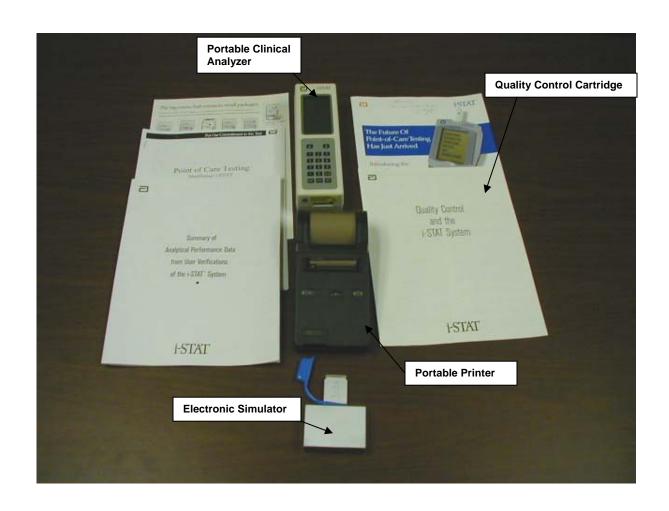

i-STAT PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Analyzer Dimensions	Height, in.	8.26
	Width, in.	2.52
	Depth, in.	2.05
Weight, oz.	18.34	
Analyzer Operating Temperature, °F	64° to 86°F	
Analyzer Transport Temperature, °F	14° to 122°F	
Humidity noncondensing	0 to 90%	
Power Requirements	Two 9-volt batteries	

i-STAT START-UP AND RESUPPLY CONSUMABLES PACKAGE

	1										
NSN	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONU S Ship Time, weeks	NOTES
6135009857845	BATTERY NONRECHARGEABLE ALKALINE AA 1.5V 1 YEAR SHELF LIFE	20-0571	1	24sPG	\$4.78	\$4.78	AMERICAN NATIONAL	60-120	N	2	AA
6135014217168	BATTERY 9 VOLT NONRECHARGEABLE USED IN HAND-HELD BLOOD GAS ANALYZER	6F2126	1	12S/ PG	\$70.00	\$70.00	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	48	N	2	LITHIUM
6550014323696	i-stat LEVEL 3 AQUEOUS,CONTROL BLOOD CHEM USE W/G E3+ G3+ EC4+ 6+ EG6+ EC6+ EC8 1.7ML	06F14- 01	1	PG	\$11.46	\$11.46	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	12	Y		All ctrls are good for 1 yr if refrig
6550014760358	CONTROL ,HCTHIGH LEVEL	310H	1	PG	\$35.50	\$35.50	HEMATRONIX	12	Y		All ctrls are good for 1 yr if refrig
6550014318279	i-stat LEVEL 1 AQUEOUS,CONTROL, CONTROL BLOOD CHEM1.7ML USE W/G E3+ G3+ EC4+ 6+ EG6+ EC6+ & EC8	06F12- 01	1	PG	\$13.18	\$13.18	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	12	Y		All ctrls are good for 1 yr if refrig
6550014760354	CONTROL HCT LOW LEVEL	310L	1	PG	\$35.50	\$35.50	HEMATRONIX	12	Y		All ctrls are good for 1 yr if refrig
6640014195698	PRINTER PAPER, USE W/HEWLETT PACKARD PTBL 6S	06F- 1171	1	PG	\$15.40	\$15.40	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	INDEF	N		All ctrls are good for 1 yr if refrig
6550015064928	CREATININE	06F10- 01	1	EA	\$2.86	\$2.86	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	12	Y		All ctrls are good for 1 yr if refrig

6515014338679	EC 8+,TEST PACK SODIUM POTASSIUM CHLORIDE PH PARTIAL PRESSURE 25S	06F04- 01	1	EA	\$9.11	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	12	Y	2	All ctrls are good for 1 yr if refrig
6550015064686	CG4+,CARTRIDGE TEST	07F02- 01	1	EA	\$12.50	ABBOTT LABORATORIES INC DIAGNOSTICS DIV	12	Y	2	All test pks will last only 2 wks at room temp if not refrig

i-STAT ACCESSORIES PACKAGE

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
_							ABBOTT			
6630014222097 Included w/ NSN	SIMULATOR QUALITY CONTROL TEST MODULE	06F11- 01	1	ΕA	\$549.00	\$549.00	LABORATORIES INC DIAGNOSTICS DIV		N	
6630014222098 Included w/	PRINTER ANALYZER	06F17-	1	E ^	¢126 27	¢126 27	ABBOTT LABORATORIES INC DIAGNOSTICS		N	
NSN	PORTABLE	01	1	EA	\$126.27	\$126.27	ABBOTT		N	
6630014878851 Included w/		06F22-					LABORATORIES INC DIAGNOSTICS			
NSN	KIT PC DOWNLOAD	13	1	EA	\$383.91	\$383.91	DIV 1 ABBOTT		N	
7610015225863 Included w/ NSN	SYSTEM MANUAL	06F20- 01	1	ΕA	\$25.00	\$25.00	LABORATORIES INC DIAGNOSTICS		N	
5975014195735 Included w/			'	LA	φ23.00	φ23.00	1 ABBOTT LABORATORIES INC DIAGNOSTICS		IN	
NSN	ADAPTER	12	1	ΕA	\$17.19	\$17.19			N	
761015225865 Included w/ NSN	IMPLEMENTATION GUIDE	IMG	1	ΕA	\$1.00	\$1.00	1 ABBOTT LABORATORIES INC DIAGNOSTICS DIV		N	
6630015221706 Included w/		06F16-			,	•	ABBOTT LABORATORIES INC DIAGNOSTICS			
NSN	HARDENED CASE	77 04J51-	1	ĿΑ	\$1716.77	<u>\$1716.77</u>	DIV ABBOTT LABORATORIES INC DIAGNOSTICS			
6630015243128	CERAMIC CARTRIDGE	04331-	1	ΕA	\$1.00	\$1.00			N	

WARMER/INFUSER, BLOOD/FLUID

Belmont Instrument Corp MODEL # FMS 2000

Manufacturer's PHONE: (978) 663-0212 FAX 978) 663-0214

Website: http://www.belmontinstrument.com

AAC "W" ITEM NSN 6515-01-370-5019 AAC "J" ITEM NSN 6515-01-465-2059

UA's: 0267, 2267, M301, M308, M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$18,200


System Description: Infuses blood or fluid warmed to physiological temperature. Self-contained system includes the warmer, volumetric fluid pump, and safety devices. System incorporates instant heating, a wide range of infusion rates, bolus infusion capability and advanced air bubble, temperature and pressure sensors.



SIDE VIEW



3 Bag Spike Disposable Set Model 2516

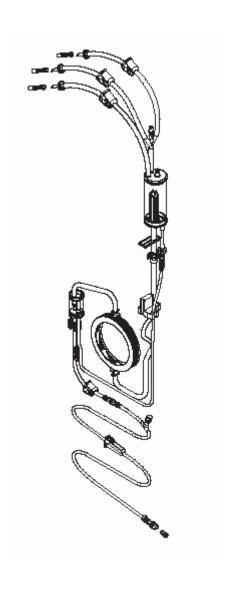

Dimensions:	13.5 in. x 7.5 in. x 12 in/
Weight:	26 lbs.
Portability:	Quick-on IV Pole Mount or Handle at top of unit.
Power:	115 volt, 15A AC input
Battery:	Internal, rechargeable for transport. Operates all functions without heating.
Fluid Pump:	Roller type peristaltic pump.
Heater:	Maximum applied power, 1350 watts.
Sensors:	2 Air bubble sensors, pressure transducer (fluid). 2 temperature probes (infrared sensing), pump flow rate sensor.
Control Computer:	Buit-in, controls all functions, with redundant hardwired overrides in case of computer failure.
Display:	5 in. x 2.5 in. Electroluminescent type, with waterproof touch pad.

FMS 2000 PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height, in.	13.5
	Width, in.	7.5
	Depth, in.	12
Weight, lb.	26lbs	
Power Requirements	115 VAC, 15 amps 60 Hz,	Internal rechargeable battery (will
_	1350 Watts	not power heat function).

FMS 2000 CONSUMABLES RESUPPLY

NSN	NOMENCLATURE	P/N	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515015178115	3 Bag Spike Disposable Set Model 2516	903- 00006	1	12\ PG		\$1500.00	BELLMONT INST.CORP.	24	N	

BAYER DIAGNOSTICS MODEL: Compur M1100 Manufacturer's Phone: (574) 256-3390

ACC "L"NSN ITEM 6640-01-068-9612

UA's: 1215, 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$2,132.46



Compur M11009 Portable Laboratory Centrifuge

PORTABLE LABORATORY CENTRIFUGE PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height, in.	2.3
	Width, in.	13
	Depth, in.	4
Weight, lbs.	2 lbs	
Power	30 Watts	
Power Requirements	115 VAC or 9 VDC	6 C cell 1.5 volt batteries

PORTABLE LABORATORY CENTRIFUGE CONSUMABLES

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, mont hs	Refri g	CON US Ship Time, weeks
6135-00-985-7846	Included W/NSN	Battery, DC 6 C cells 1.5 volt	EN93	12	EA	\$7.43	\$7.43	Danbury Union Carbide	indef	N	2
6640-01-068-9613	Included W/NSN	Tube, Capillary Micro-hematocrit	979-42	1	500 PG	\$1922	\$192	J&H Berge, Inc.	Indef	N	2

DEFIBRILLATOR, MONITOR RECORDER TOC

ZOLL MEDICAL CORPORATION MODEL M SERIES CCT

Manufacturer's PHONE: (978) 421 9460, FAX (978) 421-0010

Website: http://www.zoll.com

AAC "W" ITEM NSN 6515-01-389-6740 AAC "J" ITEM NSN 6515-01-515-4197

UA's: 0257, 0261, 2257, 2261, M301, M308, M309, M313, M413, M513, M713

USAMMA POC: Equipment Acquisition Division, 301-619-4060, DSN 343-4060

UNIT PRICE: \$18,940.00

Operator Familiarization: CD-ROM is available.



CHARACTERISTICS

Dimensions	Height	6.8"
	Width	10.3"
	Depth	8.2"
Weight.		13.5 lbs
Storage Temperature		-4° to 140° F, -20° to 60° C
Operating Temperature		32° to 122°F ,0° to 50° C
Humidity (no condensing)		5-95%
Power Requirements		110/220 VAC 50/60 HZ, 220/240 50 HZ,220 VA
_		Sealed lead acid battery pack; 5 cells 2V/CELL,
		(WIRED IN SERIES), DC INPUT 10-29 V. 130 W

M-SERIES/CCT DEFIBRILLATOR CONSUMABLES (START-UP)

NSN	NOTES	Nomenclature	QT Y	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515015185958	Included W/NSN	Xtreme Pak II Carry Case	1	EA	8000-0501-01	\$595	\$595.00	ZOLL	indef	N	2
6515015185962	Included W/NSN	Military 1-step 12- lead ECG cable	1	EA	8000-0527-30	\$319.00	\$319.00	ZOLL	indef	N	2
6515015185984	Included W/NSN	Recorder paper, 1 roll	1	EA	8000-0300	\$3.00	\$3.00	ZOLL	indef	N	2
6515015185995	Included W/NSN	Environmental protective covers		EA	8000-0400	\$100.00	\$100.00	ZOLL	indef	N	2
6515015186027	Included W/NSN	Dep Pak – Single Patient 4 YEAR SHELF LIFE	1	EA	8000-4018-30	\$80.00	\$80.00	ZOLL	48	N	2
6515015186021	Included W/NSN	Single Patient Use Airway Adapters (10)	1	10/ EA	8000-0260-01	\$65.00	\$65.00	ZOLL	indef	N	2

M-SERIES/CCT DEFIBRILLATOR CONSUMABLES (RESUPPLY)

NSN	Nomenclature	QT Y	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refri g Y/N	CONUS Ship Time, weeks
6515015092908	Dep Pak – FOUR Patient 4 YEAR SHELF LIFE	1	EA	8000-4017-30	\$280.00	\$280.00	ZOLL	48	N	2
6515015186021	Single Patient Use Airway Adapters (10)	1	(10s)EA	8000-0260-01	\$65.00	\$65.00	ZOLL	indef	N	2
6515015185955	XL Smart Ready Lead Acid Battery	1	EA	8000-0500-01	\$180.00	\$180.00	ZOLL	48	N	2

M-SERIES/CCT DEFIBRILLATOR ACCESSORIES (START-UP)

NSN	NOTES	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
NO STOCK # NEEDED	Included W/NSN	XL Smart Ready Lead Acid Batteries	3	EA	8000-0686	\$180.00	\$540.00	Zoll	indef	N	2
6515015185960	Included W/NSN	Military AC power cord w/ Ferrite	1	EA	8000-0304	\$35.00	\$35.00	Zoll	indef	N	2
6515015185967	Included W/NSN	Military EtCO ₂ cable with mainstream capnostat sensor	1	EA	8000-0410	\$1950.00	\$1950.00	Zoll	indef	N	2
6515015185970	Included W/NSN	NIBP adult cuff and hose	1	EA	8000-0653	\$29.00	\$29.00	Zoll	indef	N	2
6515015185972	Included W/NSN	Military SpO2 cable	1	EA	8000-0246-30	\$162.00	\$162.00	Zoll	indef	N	2
6515015185973	Included W/NSN	Military SpO2 adult sensor	1	EΑ	8000-0245	\$270.00	\$270.00	Zoll	indef	N	2
6515015185980	Included W/NSN	Military Temperature Cable and Probe	1	EA	8000-0409	\$450.00	\$450.00	Zoll	indef	N	2
6515015185982	Included W/NSN	Military universal cable	1	EA	8000-0308-30	\$135.00	\$135.00	Zoll	indef	N	2
6515015185962	Included W/NSN	Military 1 Step 12 – Lead ECG Cable	1	EA	8000-0527-30	\$319.00	\$319.00	Zoll	indef	N	2
7610015189206	Included W/NSN	Operator's/Service manual Inservice CDROM	1	SE	9650-0502-30	\$56.00	\$56.00	Zoll	indef	N	2
6515015046492	Included W/NSN	M Series external paddle assembly	1	EA	8000-1010-01	\$396.00	\$396.00	Zoll	indef	N	2
6515015186011	Included W/NSN	Hardigg Case w/ label	1	EA	8000-0850-30	\$980.00	\$980.00	Zoll	indef	N	2
6515015186016	Included W/NSN	1X1 Battery Charger	1	EA	8050-0022-30	\$506.00	\$506.00	Zoll	inde	N	2
6515015186030	Included W/NSN	PCMCIA Data Card, 16 MEG (2 per pack)	1	EA	8000-0167	\$396.00	\$396.00	Zoll	inde	N	2




DEP PAK FOUR, PATIENT 8000-4017-30




1X1 BATTERY CHARGER 8050-0022-30




XL SMART READY LEAD ACID BATTERIES, 8000-0686



5 LEAD ECG CABLE 8000-0527-30




MILITARY UNIVERSAL CABLE, 8000-0308-30




M SERIES EXTERNAL PADDLE ASSEMBLY, 8000-1010-01




CUFF NIBP ADULT AND HOSE 8000-0653

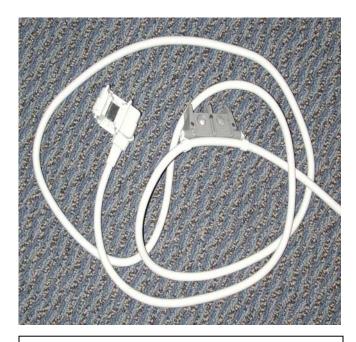


ETCO2 CABLE WITH MAINSTREAM CAPNOSTAT SENSOR 8000-0410

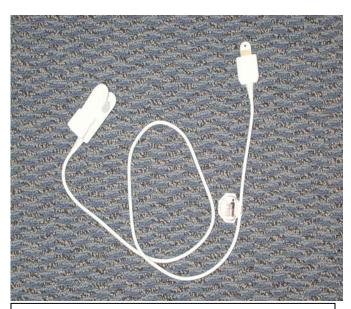

MILITARY SpO2 ADULT SENSOR 8000-0245




MILITARY SpO2 CABLE 8000-0246-30

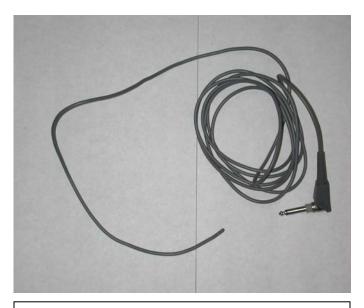


TEMPERATURE CABLE & PROBE 8000-0409



Hardigg Case w/label 8000-0850-30 CASE ONLY ITEMS SHOWN IN THIS CASE INCLUDES THE STARTUP KIT

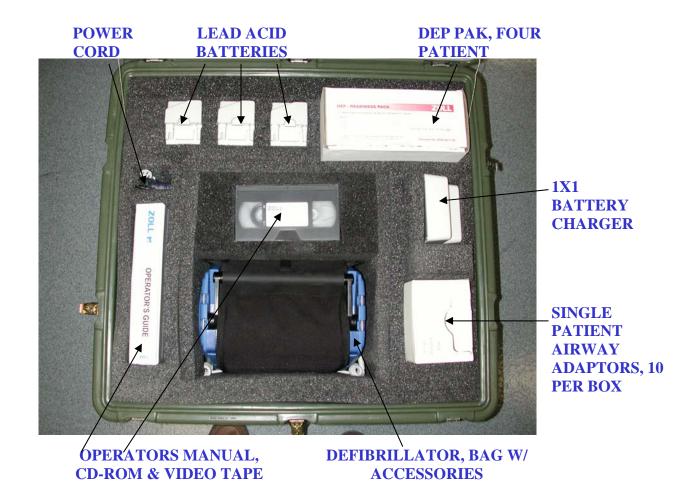

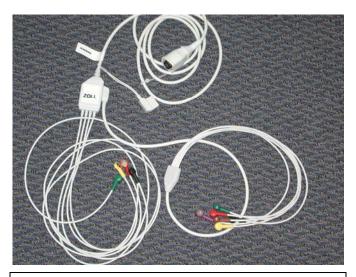

Military 1 Step 12 –Lead ECG Cable 8000-0527-30

DEFIBRILLATOR/MONITOR

MEDTRONICS LIFE-PAK 10 MODEL # LP 10 (10-59 PMI)

Manufacturer's PHONE: (425) 867-4000, FAX (425) 867-4537

Website:

AAC "W" ITEM NSN 6515-01-389-6740 AAC "J" ITEM NSN 6515-01-480-9614

UA's: 0257, 2257, 2267,

USAMMA POC: Equipment Acquisition Division, 301-619-4060, DSN 343-4060

Unit PRICE: \$16,397.60

System Description: Defibrillator / Monitor Recorder ECG System. System incorporates 3 lead ECG, adjustable delivery output range of 10-140 milliamps, and adjustable energy steps from 10 to 360 joules. C/O Noninvasive asynchronous pacemaker, pacing rates are 40 thru 150 beats per minute

Operator Familiarization: CD-ROM is available.









LIFEPAK 10 PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	4"
	Width	16"
	Depth	14.6"
Weight.		20 lbs
Storage Temperature		-22° to 149° F
Operating Temperature		14° to131° F
Humidity		0-95% (32° to 93° F)
(noncondensing)		0-80% (95° to 131° F)
Power Requirements		110/220 VAC 50/60 HZ, Dual Voltage Rated,
_		3 Nicd batteries, 12VDC, 1.0 amp hr ea

LIFEPAK 10 CONSUMABLES (START-UP)

NSN	INCLUDED WITH NSN	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONUS Ship Time, weeks
6515011397845	INCLUDED WITH NSN	PAPER EKG	5	3PG	804700-003	\$17.00	\$85.00	MEDTRONIC.	indef	N	2
6515012672728	INCLUDED WITH NSN	ELECTRODE EKG ADULT	4	3PG	800139-003	\$2.60	\$10.40	MEDTRONIC	indef	N	2
6515014863905	INCLUDED WITH NSN	ELECTRODE EKG ADULT	3	4PG	800139-004	\$6.00	\$18.00	MEDTRONIC	indef	N	2
6515014863905		ELECTRODE PACING	6	EA	805400-00	\$44.00	\$264.00	MEDTRONIC	indef	N	2
6515011534970		ELECTRODE GEL, 4 OZ	2	PG	9-10236-00	\$3.00	\$6.00	MEDTRONIC	indef	N	2

LIFEPAK 10 ACCESSORIES PACKAGE RESUPPLY

								Oh alf		CONIL
								Shelf Life,		CONU S Ship
						Total		month	J	Time,
NSN	Nomenclature	QTY	UI	PART#	Unit Price	Price	MFG	S	Y/N	weeks
6515013459441	BATTERY FASTPAK	1	ΕA	9-10424-18	\$120.78	\$120.78	MEDTRONIC	indef	N	2

LIFEPAK 10 ACCESSORIES PACKAGE START-UP

NSN	INCLUDED WITH NSN	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
6515013459441	INCLUDED W/NSN	BATTERY FASTPAK	1	ΕA	9-10424-18	\$114.00	\$114.00	MEDTRONIC	indef	N	2
6515013459448	INCLUDED W/NSN	CARRYING CASE	1	ΕA	805155-01	\$104.31	\$104.31	MEDTRONIC	indef	N	2
	INCLUDED W/NSN	BATTERY SUPPORT SYSTEM	1	EA	BSS2	\$1785.00	\$1785.00	MEDTRONIC	indef	N	2
6515014863902	INCLUDED W/NSN	CABLE EKG	1	EA	805400-00	\$60.00	\$60.00	MEDTRONIC	indef	N	2
6515014863903	INCLUDED W/NSN	AUXILIARY POWER MODULE 120 VAC	1	EA	806311-07PMI	\$800.00	\$800.00	MEDTRONIC	indef	N	2
	INCLUDED W/NSN	AUXILIARY POWER MODULE SINGLE CABLE	1	EA	804219-02	\$75.00	\$75.00	MEDTRONIC	indef	N	2
651501397844	INCLUDED W/NSN	PEDIATRIC PADDLE, EXTERNAL	1	EΑ	800418-00	\$50.13	\$50.13	MEDTRONIC	indef	N	2
6515-01-458-5957	INCLUDED W/NSN	POSTERIOR PADDLE, EXTERNAL ADULT	1	EA	802461-02	\$205.00	\$205.00	MEDTRONIC	indef	N	2

LIFEPAK 10 CONSUMABLES RESUPPLY

NSN	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONUS Ship Time, weeks
6515011397845	PAPER EKG	5	3PG	804700-003	\$17.00	\$85.00	MEDTRONIC.	indef	N	2
6515012672728	ELECTRODE EKG ADULT	4	3PG	800139-003	\$1.92	\$7.68.00	MEDTRONIC	indef	N	2
6515014863905	ELECTRODE EKG ADULT	3	4PG	800139004	\$6.00	\$18.0000	MEDTRONIC	indef	N	2
6515011534970	ELECTRODE GEL, 4 OZ		6PG	9-10236-00	\$3.00	\$6.00	MEDTRONIC	indef	N	2

VALLEY LAB A DIVISION OF TYCO MODEL FORCE-2

Manufacturer's PHONE: (800) 255-8522, FAX (303) 581-6776 Website: http://www.valleylab.com/product/es/generators/f2-over.html

AAC "W" ITEM 6515-01-486-0161 AAC "J" ITEM 6515-01-309-6647

UA's:2267, M301

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$11,613.46

System Description: The Force 2 electrosurgical unit provides both cutting and coagulation in monopolar and bipolar outputs. Simultaneous independent coagulation permits two surgeons to fulgurate from a single generator. Accessories are activated only when keyed, reducing the potential for injury caused by inadvertent activation. Preset blended cutting modes provides optimum hemostasis during cutting. The Force 2 provides Return Electrode Monitoring (REM) substantially reducing the risk of patient burns at the return electrode site. 300 Watts output in cut mode. Monopolar footswitch included. The Valleylab Force 2 accepts all standard Valleylab accessories to help meet the surgeon's needs, in a wide range of general procedures, and in specialties including gynecology, urology, thoracic, and plastic and reconstructive surgery. Low voltage coagulation ensures controlled desiccation with less destruction of peripheral tissue, making the Force 2 generator ideal for laparoscopic procedures.



VALLEYLAB FORCE 2 CHARACTERISTICS

Dimensions	Height, in.	8
	Width, in.	13
	Depth, in.	21
Voltage	115/230 VAC 60Hz	
Weight, lbs	23	
Fuse	8 Amp max	
Output Power		
- Cut	300 Watts	
- Blend 1	250 Watts	
- Blend 2	200 Watts	
- Blend 3	150 Watts	
- Coag	120Watts	
- Low voltage coag	70 Watts	
- Bipolar	0-70 Watts	

FORCE 2 CONSUMABLES PACKAGE

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515011192930	Dista arrayadina alaatraayarriaal dismaashla	1149	1	100 EA	¢1 /2		3M Company	Indef	N	2
0313011192930	Plate, grounding electrosurgical disposable	1149	1	EA	\$1.43	\$145.55	Company	maei	IN	
6515011563011	Electrode, electrosurgical apparatus with removable blade	130305	1	40 PG	\$5.96	\$238.43	ConMed	Indef	N	2
6515010960217	Handle and electrode set, electrosurgical apparatus	E2502B	1	10 EA	\$25.53		Tyco Healthcare	Indef	N	2
6515013087699	POLYHESIVE II CORDLESS PAD, 50S, E7509	E7509	1	50\CS	\$117.00	\$117.00	US SURGICAL	Indef	N	2
6515012219399	DISPOSABLE HANDSWITCH PENSIL W/ HOLSTER, 50S	E2515H	1	50\PG	\$164.00	\$164.00	VALLEY LAB INC.	Indef	N	2
6515011098537	LECTROGEL, 10 TUBES PER BOX	E5501	1	10\PG	\$109.50	\$109.50	BAXTER	Indef	N	2

FORCE 2 ACCESSORIES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515014878238	Universal Cart	UC8009	1	EA	\$890.00	\$890.00	Tyco Healthcare	Indef	N	
6515-01-269-4218	Cord, bipolar forceps 12 ft Foot- switch/sterile disposable	E0509	1	50 PG	\$3.25	\$162.50	Tyco Healthcare	Indef	N	
5930-01-328-2275	Footswitch Monopolar	E6008	1	EA	\$355.73		Tyco Healthcare	Indef	N	
5930015220410	Footswitch Bipolar	E6019	1	EA	\$108.15	\$108.15	Tyco Healthcare	Indef	N	
6515015191280	Forcep Insulated 7-3/4" bayonet	E4051CT	1	EA	\$308.00	\$308.00	Tyco Healthcare	Indef	N	
6515015220407	Clamp/Cord Assembly	E0560	1	BX	\$44.00		Tyco Healthcare	Indef	N	
6515015265309	Bipolar Forceps Cord	DQi2401	1	BX	\$105.00	\$105.00	Tyco Healthcare	Indef	N	
6515014652165	Extended Coated Blade	E14506	1	50\EA	\$267.50	\$267.50	Tyco Healthcare	Indef	N	
6515015231952	Coated Needle Electrode	E1452	1	50\EA	\$242.00	\$242.00	Tyco Healthcare	Indef	N	
6515015227874	Edge Insulated Coated Blade	E1455	1	50S	\$257.50	\$252.50	Tyco Healthcare	Indef	N	
6515015232383	Edge Insulated Blade W/Sleeve 2.75	E1455B	1	25\P	\$265.00			Indef	N	
6515015220408	Active Adapter	E050212	1	BX	\$44.03	\$44.03	Tyco Healthcare	Indef	N	

FIXATOR, HOFFMAN II, EXTERNAL

STRYKER/HOWMEDICA MODEL 4920-9-960

Manufacturer's PHONE: (201) 831-5726 FAX(201) 831-6553

Website: http://www.trauma.stryker.com/index/st_pag_product-portfoliosection/st_pag_external-fixation-systems.htm


AAC "L" ITEM NSN 6515-01-464-0077

UA's:2267,M302, M342, M342, M542, M583, M742, M783

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$19,425.00

System Description: Device providing rigid immobilization through external skeletal fixation utilizing rods attached to pins placed in or through the bone. Used for both open fractures and septic nonunion.



HOFFMAN II PHYSICAL SPECIFICATIONS

Dimensions, in.	Height	21.6
	Width	10.2
	Depth	4.3
Weight, lb.	20.1	



ANKLE TRACTION


TRAVELING TRACTION

Hoffman II FIXATOR KIT UPPER INSERT, LOWER INSERT, BASE

X Level 3/4/5 External Fixation System

- Components and instruments interchangeable with the Forward Deployed Field Pack Fixator
- Color-coded components for improved intra-operative and post-operative inventory management
- Integrated snap-fit mechanism allows easy assembly and temporary fixation during reduction maneuvers
- Clamps made of aluminum alloys and stainless steel, significantly reducing overall frame weight, without compromizing stability





Co	mponent Listing		
	Description	Qty	Catalog Number
A	Rod-to-Rod Coupling 8/8mm	16	4920-1-010
В	Removable Thumbwheel	2	4920-9-020
С	Pin-to-Rod Coupling 8mm/4+5mm	6	4920-1-020
D	4mm x 300mm, 40mm Central Thread	2	5030-4-300
E	5mm x 180mm, 50mm THD SD/ST Apex® Half Pins	26	5018-6-180
F	5mm x 150mm, 40mm THD SD/ST Apex® Half Pins	12	5018-5-150
G	4mm x 150mm, 40mm THD SD/ST Apex® Half Pins	12	5023-5-150


X Lower Insert



ſ	Cor	mponent Listing		
ı		Description	Qty	Catalog Number
1	Н	Multi-Pin Clamp Assembly	16	4920-2-020
١	1	30° Angled Post, Stainless Steel	16	4920-2-140
١	J	Guide Sleeve with Trocar for 5mm/150mm pins	2	5054-5-150
ı	K	Guide Sleeve with Trocar for 4mm/150mm pins	2	5054-4-150
ı	_	Guide Sieeve with Hotal for 4hun, 150hun phis	- 4	3034 4-130

X Level 3/4/5 External Fixation System - continued



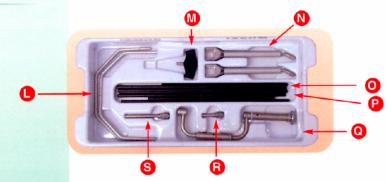

Cor	mponent Listing		
	Description	Qty	Catalog Number
L	Curved Aluminum Rod Semi-Circular Large 214mm Width	2	5029-7-032
М	T-Wrench	1	5054-3-051
N	Stabilization/Reduction Wrench	2	4920-9-010
0	Carbon Connecting Rod 8mm x 400mm	6	5029-8-840
P	Carbon Connecting Rod 8mm x 300mm	6	5029-8-830
Q	Drill Brace	1	5054-2-002
R	4mm Chuck	1	5054-2-004
S	5mm Chuck	1	5054-2-051

Military External Fixation Case - Catalog #4920-9-960 NSN #6515-01-464-0077

Specifications:

21.6 in (55 cm) L Dimensions:

10.2 in (26 cm) W 4.3 in (11 cm) D

Weight: 5.2 lb (2.35 kg)

FIXATOR ACCESSORIES

NSN	Notes	Nomenclature	QTY	U/I	P/N	Unit Price	Total Price	MFG	Refrig Y/N	CONUS Ship Time, weeks
6515014640077		Level 3/4/5 External Fixation System	1	EA	4920-9-970	\$19,425,00	\$19,425,00	Howmedica	N	2
UPPER INSERT						,	,			_
6530015224432	Included W/NSN	Case, Reuseable, Steam Sterilizable, Custom	1	EA	4920-9-960	\$1,467.75	\$1,467.75	Howmedica	N	<u>2</u>
6515014631498	Included W/NSN	Coupling Fixation Ortho 8/8MM	16	EA	4920-1-010	\$313.50	\$5,016.00	Howmedica	N	2
6515015224925	Included W/NSN	Thumbwheel, Removable	2	EA	4920-9-020	\$67.45	\$134.90	Howmedica	N	2
6515014631473	Included W/NSN	Coupling Pin to Rod 8MM/4-5MM	6	EA	4920-1-020	\$313.50	\$1881.00	Howmedica	N	2
6515014631494	Included W/NSN	Pin Ortho 4MM Dia x 300MM LG 40MM Central Thread	2	EA	5030-4-300	\$85.50	\$171.00	Howmedica	N	2
6515015131261	Included W/NSN	Pin Bone Hoffman EXT Fixation Sys 5mm Dia	26	PG	5018-6-180	\$74.10	\$1,926.60	Howmedica	N	2
6515015039984	Included W/NSN	Pin Bone CRS 5MM Dia 150MM LG Half Pin Fix	12	EA	5018-5-150	\$74.10	\$889.20	Howmedica	N	2
6515015061850	Included W/NSN	Pin Bone 150MM LG 4MM Thread	12	EA	5023-5-150	\$60.80	\$729.60	Howmedica	N	2
LOWER INSERT										
6515014631475	Included W/NSN	Pin Clamp Assembly W/No Post Ortho	16	EA	4920-2-020	\$338.20	\$5,411.20	Howmedica	N	2
6515014631497	Included W/NSN	Post Angle Fixation Ortho 30 DEG SS	16	EA	4920-2-140	\$61.75	\$988.00	Howmedica	N	2
6515013532367	Included W/NSN	Dbl Sleeve-Trocar Fixation Ortho	2	EA	5054-5-150	\$213.75	\$427.50	Howmedica	N	2
6515014469703	Included W/NSN	Fixator Hoffman DBL Sleeve Trocar 150MM	2	EA	5054-4-150	\$200.45	\$400.90	Howmedica	N	2
BASE										
6515014631467	Included W/NSN	Rod Semi-Circular Fixation Alum External	2	EA	5029-7-032	\$92.15	\$184.30	Howmedica	N	2
6515013532554	Included W/NSN	Wrench Fixation T-Wrench W/35MM Ext SS	1		5054-3-051	\$183.00	\$183.00	Howmedica	N	2
6515015232438	Included W/NSN	Wrench, Stabilization/Reduction Rod Carbon Connect EXT Fixa 400MM	2		4920-9-010	\$247.95	\$495.90	Howmedica	N	2
6515015040434	Included W/NSN	LG 8MM W	6	EA	5029-8-840	\$82.65	\$495.90	Howmedica	N	2
6515015040433	Included W/NSN	Rod Carbon Connect EXT Fixa 300MM LG 8MM W	6	EA	5029-8-830	\$76.00	\$456.00	Howmedica	N	2
6515012085966	Included W/NSN	Brace Bit Fixation Drill Bit W/O Chuck Reuseable	1	EA	5054-2-002	\$411.35	\$411.35	Howmedica	N	2
6515012969606	Included W/NSN	Chuck Drill Plain 4MM Size Arbor Hole Thread	1	EA	5054-2-004	\$125.40	\$125.40	Howmedica	N	2
6515012085965	Included W/NSN	Chuck Fixation AGM 51 5MM 75MM EXT Orig	1	EA	5054-2-051	\$153.90	\$153.90	Howmedica	N	2

FIXATION EXTERNAL PEEL PACK ORTHOPEDIC STER HOFFMAN II STYLE COMPLETE FORWARD DEPLOYED FIELD PACK FIXATOR TOC

STRYKER/ORTHOPEDICS MODEL # 4920-9-950


Manufacturer's PHONE: (201) 831-5726 FAX (201) 831-6553

Website: http://www.trauma.stryker.com/index/st_pag_product-portfoliosection/st_pag_external-fixation-systems.htm

AAC "L" NSN 6515-01-463-1464

UA's: 2267, M302, M308, M342, M542, M583, M742, M783

USAMMA POC: Equipment Acquisition Division, 301 619-4060, DSN 343-4060 UNIT PRICE: \$1702.00

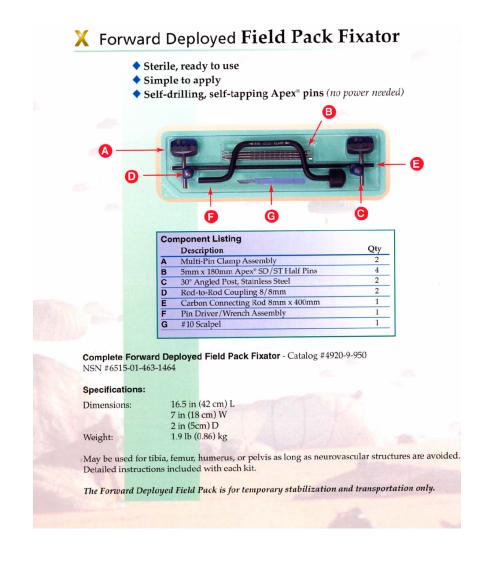

FIXATOR ALTERNATIVE SET ACCESSORIES

NSN	NOTES	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Refr ig Y/N	CONUS Ship Time, weeks
6515014631464		Complete Forward Deployed Field Pack Fixator	1	EA	4920-9-950	\$1702.00	\$1702.00	Howmedica	N	2
6515014631475	Included W/NSN	Pin Clamp Assembly W/No Post Ortho	1	EA	4920-2-020	\$311.00	\$311.00	Howmedica	N	2
6515015131261	Included W/NSN	Pin Bone Hoffman Extension Fixation System 5MM Dia x 180MM Long	1	EA	5018-6-180	\$86.00	\$86.00	Howmedica	N	2
6515014631497	Included W/NSN	Post Angled Fixation Ortho 30	1	EA	4920-2-140	\$55.00	\$55.00	Howmedica	N	2
6515014631498	Included W/NSN	Coupling Fixation Ortho 8/8MM Replacement Item	1	EA	4920-1-010	\$279.00	\$279.00	Howmedica	N	2
6515015040434	Included W/NSN	Rod Carbon Connecting EXT Fixator 400MM Long 8MM Width	1	EA	5029-8-840	\$87.00	\$87.00	Howmedica	N	2
NO STK # NEEDED	Included W/NSN	Pin Driver/Wrench Assembly						Howmedica	N	2
PRIME VENDER	Included W/NSN	#10 Scalpel						Howmedica	N	2

WELCH ALLYN MODEL 69043

Manufacturer's PHONE: (315) 685-4560 FAX (315) 685-3366

Website: http://www.welchallyn.com

AAC "D" ITEM NSN 6515-00-616-5052

UA's:0267, M370

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$109.30

Features:

- Reduced handle and blade weight for improved balance and maneuverability facilitates even the most difficult intubations.
- Blades easily convert from lamp to fiber optic illumination, making upgrading economical.
- Repairable, allowing replacement of deteriorating light pathways for a fraction of the cost of a replacement blade.
- Improved design with reduced proximal blade height assists in intubating patients with limited oral access.
- Single-piece stainless steel blades ensure blade integrity (no soldered joints).



Handle is included with set

LARYNGOSCOPE BLADE ACCESSORIES/CONSUMABLES (STARTUP)

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
c125000257210	T 1 1 1 WAYON	BATTERY NONRECHARGEABLE 1.5	F05	1	12 /DC	¢7.16	ф 7 .1.6	EVEREADY BATTERY CO	. 1.0	N	2
6135008357210	Included W/NSN	VOLT CYLINDRICAL BLADE LARYNGOSCOPE	E95	1	12s/PG	\$7.16	\$7.16	INC.	indef	N	2
6515009558836	Included W/NSN	MACINTOSH CHILD 108MM	MIL-S-36628	1	EA	\$64.00	\$64.00	PRIME VENDER	I		
6515009134605	Included W/NSN	LARYNGOSCOPE MCINTOSH INFANT 87 MM	69041	1	EA	\$45.00	\$45.00	WELCH ALLYN			
6515009134607	Included W/NSN	BLADE LARYNGOSCOPE LARGE ADULT MACINTOSH	MILL36628	1				PRIME VENDER			
6515009558865	Included W/NSN	BLADE LARYNGOSCOPE MED ADULT MACINTOSH 130MM	4-090-012	1		\$25.11		WELCH ALLYN			
6515008902190	Included W/NSN	HANDLE LARYNGOSCOPE BATTERY VOLTAGE RATING 1.5 VOLTS	AN560	1	EA	\$46.24	\$46.24	AESCULAP INC.			
6240005529672	Included W/NSN	LAMP INCANDESCENT B25 T BULB STYLE 2.5V FROSTED WHITE LIGHT, CHILD AND INFANT BLADE	4-514-003-00	1	EA	\$4.22	\$4.22	PURITAN BENNET CORP			
6240007970420	Included W/NSN	LAMP INCANDESCENT B25 T STYLE WHITE LIGHT .280 AMPERES	NONE	1	EA	\$4.22		PRIME VENDER			

COMPANY IS OUT OF BUSINESS

SURGICAL HEAD LIGHT GOODLITE TOC

GOOD LITE CO MANUFACTURER: MODEL # Manufacturer's PHONE:(708) 366 3860

AAC "L" ITEM NSN 6515-01-227-3563

UA's:

USAMMA POC: Equipment Acquisition Division, (301) 619-4060 DSN 343-4060 UNIT PRICE: \$490.50

FEATURES: Comes with transformer with two voltage outputs. Provides minimum illumination of 2000 foot candles at 24 in. and 3500 foot candles at 16 in. light field.



WELCH ALLYN. MODEL # 49020M

Manufacturer's PHONE: (315) 685-4560 FAX (315) 683-3361

Website: http://www.welchallyn.com

AAC "L" ITEM NSN 6230-01-520-3474

UA's: 2267, M308, M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$447.53

Features:

- Weighting less than four ounces, it's one of the most comfortable lightweight headlights available
- With a color temperature of 5500 Kelvin, this light supplies bright, white, shadow-free light allowing the end user to see tissue characteristics without distortion
- It's operating life expectancy is 10,000
- Enjoy the flexibility of operating the headlight using the direct power source or the rechargeable "belt-clip: portable power source.

Clinical Benefits

- Long operating life (10,000 hours of continuous burn)
- More energy efficient than incandescent and halogen lamps
- Cool beam is safe to touch
- Instant light (less than 100ns)
- Virtually maintenance-free operation
- No UV rays

Suggested Applications The Solid State Procedure Headlight provides ideal illumination for procedures such as minor surgery, general examinations, foreign body removal, OB/GYN applications and procedures, dermatology examinations or any procedure that requires a small, homogenous and well-defined spot.

WELCH ALLYN. SURGICAL HEADLIGHT



Technical Specifications

Spot Size Range: 1.5 to 6 inches at the working distance **Light Source**: Five-watt Solid State lamp, color temperature 5500 Kelvin, TBD Lumens, life 10,000 hours continuous

burn

Working Distance: 16 inches

Battery Run-Time: One hour continuous run-time on a fully charged battery

Battery Life: Approximately 2.5 years (depending on usage)

Warranty: One-year limited warranty

CONSUMABLES ACCESSORIES STARTUP

									CONU S Ship
				QT			Total		Time,
NSN	NOTES	Nomenclature	PN	Y	UI	Unit Price	Price	MFG	weeks
6530015225307	Included W/NSN	Carrying Case	49099	1	EA	\$193.98	\$193.98	WELCH ALLYN	2
	Included W/NSN	Charger Only for Portable							
6230015221304		Power Source	74180	1	EA	\$37.11	\$37.11	WELCH ALLYN	2
6230015221307	Included W/NSN	Portable Power Source Only	75200	1	EA	\$154.78.	\$154.78	WELCH ALLYN	2
6230015221337	Included W/NSN	Direct Power Supply	75270	1	EA	\$50.75	\$50.75	WELCH ALLYN	2



CARRYING CASE, PART# 49099 6530015225307



Portable Power Source Only PART # 75200 6230015221307



DIRECT PLUG IN TRANSFORMER UNIT, PART # 75270 6230015221337



CHARGER, PART # 74180

LIGHT SURGICAL FIELD UNIT

FEDMEDICAL INC MODEL # FMI-301FB

Manufacturer's PHONE: (843) 554-7004 FAX (843) 832-4343

Website: http://www.fedmedical.com

AAC "L" ITEM NSN 6530-01-518-9854

UA's: 2267, M301

USAMMA POC: Equipment Acquisition Division: 301-619-4060, DSN 343-4060

UNIT PRICE: \$6,187.16

System Description: Color-correct, shadow-free, illumination, full-sized surgical light, floor mounted, swivel light, 12V halogen bulb, 50 watt, lamp housing diameter, 11.4 inch, 6 hour back-up battery and case, for field or theater of operation use, ultra-light suspension. The base of this light is made of 14 gauge, powder coated steel and can hold 250 lbs. The lamp suspension allows fingertip control and secure, drift-free positioning. **Special Features:**

Internal "smart" circuit automatically adjusts for 110-220VAC or 24VDC 50,000 lux of color-correct brilliance at (1-m)

More accurate tissue differentiation and diagnosis—with 4,500 K color temperature for truer colors

27" depth of field and 5.5" field diameter Optimized shadow reduction Sealed light head keeps contaminates out Quick, tool-free bulb exchange Extremely low heat emission Drift-free suspension



CHARACTERISTICS

Dimensions Case	Height, in.	20	Maximum from lens to
			floor 78" (198 cm)
	Width, in.	28	
	Depth, in.	34	
Weight, lbs.		120	
Cube Ft.		11.01	
Operating Temperature			
	35°F to 130°F		
Operating Humidity	90 RH		
Storage Temperature	32°F to 150°F		
Storage Humidity	99 RH		
Power Requirements	110-220 vac or 12 vdc, 55 amps hrs, 230 watt		



BASE OF SYSTEM



HARDENED CASE

ACCESSORIES (START-UP)

						Unit	Total		Shelf Life.	Refrig	CONUS Ship Time.
NSN	NOTES	Nomenclature	PN	QTY	UI	Price	Price	MFG	months		weeks
6530015275566	Included W\NSN	Reusable,sterilizable light handle cover	41-2001	1	EA	\$89.25	\$89.25	Fedmedical inc.	N	N	2
6530015275501	Included W\NSN	Disposable light handle cover	41-2002	1	BX\25s	\$85.45	\$85.45	Fedmedical inc.	N	N	2
6530015275497	Included W\NSN	Bulb, 12 volt, 50 watt, Halogen	41-2010	1	EA	\$87.35	\$87.35	Fedmedical inc.	N	N	2
6530015275487	Included W\NSN	15 ft DC cord w/connector	41-2020	1	EA	\$60.75	\$60.75	Fedmedical inc.	N	N	2
6530015275490	Included W\NSN	Hardened case with foam	41-2100	1	EA	\$844.65	\$844.65	Fedmedical inc.	N	N	2
6130015263300	Included W\NSN	12 VOLT Battery, 55 amp hour	41-1002	1	EA	\$100.00	\$100.00	Fedmedical inc.	N	N	2

PROPAQ, 206 EL MONITOR WITH PULSE OXIMETRY WELCH ALLYN

MANUFACTURER'S PHONE: (503) 530-7500 FAX (503) 530-4910

AAC "W" ITEM NSN 6515-01-465-3285 AAC "J" ITEM NSN 6515-01-432-2707

UA's: 2257, 2261, 2267, M308, M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$7,316.80

SYSTEM DESCRIPTION: Rugged, lightweight, portable vital signs monitor for field use.

TEST PERFORMED

Heart/Pulse rate
3-5 Lead ECG
Non Invasive BP
2 Channel Invasive BP
Temperature
Pulse Oximetry
Respiration

ADVANTAGES


Motion tolerant
monitoring.
Small, lightweight
Ease of use
Modular
Ruggedized
Automatic sensor
detection

PROPAQ 206 EL VITAL SIGNS MONITORFRONTAL VIEW



Operator Familiarization: CD-ROM is available

PROPAQ 206 EL VITAL SIGNS MONITOR RIGHT SIDE VIEW

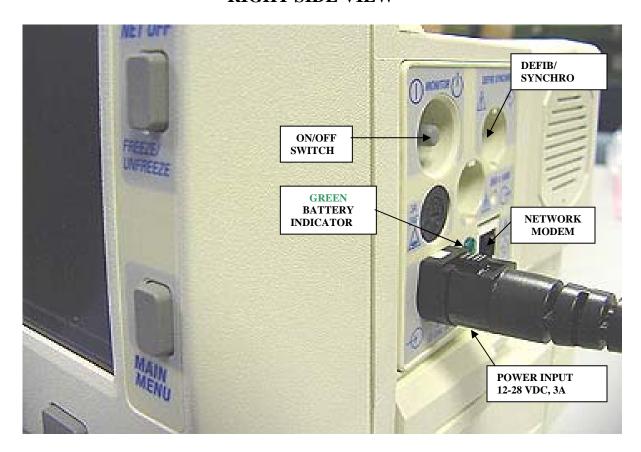




ECG CABLE, 5 LEAD, (008-0313-00)




NIBP CUFF, ADULT (008-0628-00)



CABLE, PULSE OXIMETRY, 8 FEET, (008-0742-00)



 $\begin{array}{c} HOSE, NIBP\ ADULT/PEDIATRIC,\\ (008-0238-00) \end{array}$




NIBP CUFF KIT THIGH, (008-0324-00)



TEMPERATURE PROBE, (008-0419-01)



AC POWER ADAPTER, (503-0054-00)



NIBP CUFF KIT ADULT, (008-0324-00)



DURASENSOR REUSABLE FINGER, SPO², (900-0021-00)



NIBP CUFF KIT PEDIATRIC, (008-0324-00)



MILITARY REUSABLE CONTAINER (008-0586-00) WITH ACCESSORIES SHOWN

PROPAQ 206EL PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	9.6"	
	Width	8.2"	
	Depth	7.6"	
Weight		13.5 lbs	
Operating Temperature		0° to 40°C degrees	
Storage Temperature		-20° to 60°C degrees	
Humidity non-condensing		15% to95%	
Power Requirements		110/208VAC=/- 10%,	12-23 VDC
		50/60 HZ	
		.06 KW	

PROPAQ 206EL MONITOR WITH PULSE OXIMETRY ACCESSORIES (STARTUP)

NSN	NOTES	Nomenclature	QTY	UI	PART#	UNIT PRICE	Total Price	MFG	Shelf Life, month	Refrig Y/N	CONUS Ship Time, weeks
NO STK #								Welch			
NEEDED	Incl W/ NSN	SPO2 OPTION	01	EA	01040003	\$1,763.00	\$1,763.00	Allyn	Indef	N	2
NO STK # NEEDED	Incl W/ NSN	RESPIRATION OPTION	01	EA	01040010	FREE	FREE	Welch Allyn	Indef	N	2
NO STK #								Welch			
NEEDED	Incl W/ NSN	PRINTER	01	EA	01040665	\$1054.00	\$1054.00	Allyn	Indef	N	2
NO STK #		COMMUNICATION						Welch			
NEEDED	Incl W/ NSN	OPTION	01	EA	01040011	\$419.00	\$419.00	Allyn	Indef	N	2
6515015100550	T 137/21021	MILITARY	0.1	E 4	000 0506 00	0.57.6.40	Ø57.6.40	Welch	T 1 C		
6515015189559	Incl W/ NSN	CONTAINER	01	EA	008-0586-00	\$576.40	\$576.40	Allyn	Indef	IN	2
6515015190163	Incl W/ NSN	Pulse oximetry probe reusable durasensor DS100A	01	EA	900-0021-00	\$225.00	\$225.00	Welch Allyn	Indef	N	2
6515015189839	Incl W/ NSN	Temp Probe General Purpose Reusable Adult Autoclavable, YSI #401 AC NIBP Cuff, adult	01	EA	008-0419-01	\$68.00	\$68.00	Welch Allyn	Indef	N	2
6515015189556	Incl W/ NSN	standard reusable w/ "twist lock" connector	01	EA	008-0628-00	\$35.00	\$35.00	Welch Allyn	Indef	N	2
6515 015190962	(must designate 5 lead) Incl W/ NSN	ECG Cable, 5 lead, 10 foot, W/ 5 attached lead wires, snap	01	EA	008-0313-00	\$91.00	\$91.00	Welch Allyn	Indef	N	2
6515 015191102	Incl W/ NSN	AC Adapter for recharging battery, 120 VAC 60 HZ	01	EA	503-0054-00	\$122.00	\$122.00	Welch Allyn	Indef	N	2
6515015039828	Incl W/ NSN	Power Cord, Hospital Grade 100-120 VAC	01	EA	008-0333-00	\$23.00	\$23.00	Welch Allyn	Indef	N	2
6515015010661	Incl W/ NSN	Cable, Pulse Oximetry, 8 foot extension	01	EA	008-0742-00	\$65.00	\$65.00	Welch Allyn	Indef	N	2
6515014365080	Incl W/ NSN	Hose, NIBP Adult/Pediatric	01	EA	008-0238-00	\$20.00	\$20.00	Welch Allyn	Indef	N	2
6515 015191100	Incl W/ NSN	Cuff Kit, NIBP adult reusable w/ "twist lock" connector	01	EA	008-0324-00	\$95.00	\$95.00	Welch Allyn	Indef	N	2
7610015189140	Incl W/ NSN	Technical Reference Guide ((Service Manual), CD	02	EA	810-1084-00	\$45.00	\$90.00	Welch Allyn	Indef	N	2
7610015189122	Incl W/ NSN	Operator's Manual	02	EA	810-0867-00	\$45.00	\$90.00	Welch Allyn	Indef	N	2
7610015189142	Incl W/ NSN	Video, In-service North America (NTSC)	01	EA	810-0835-00	\$27.00	\$27.00	Welch Allyn	Indef	N	2

PROPAQ 206EL WITH PULSE OXIMETRY CONSUMABLES START-UP

NSN	NOTES	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONU S Ship Time, weeks	NOTES
NO STK # NEEDED	Incl W/ NSN	Paper, Printer, Roll	03	EA	x			Welch Allyn	Indef	N	2	
6515015189543	Incl W/ NSN	Electrodes Gel	01	5pg	6200-10	\$5.00	\$5.00	Welch Allyn	indef	N		FINGER 1 PATIENT
6515 012714894	Incl W/ NSN	Sensor SPO2 finger disposable	01	3 pg	D-25	\$394.18	\$394.1 8	NELLCOR	indef	N	2	
6515014128673	Incl W/ NSN	Paper, printer Roll		10pg	008-0040-98	\$27.00	\$27.00	Welch Allyn	indef	N	2	
6515 015195855	Incl W/NSN	Electrodes, Gel	02	30pg	6200-11	\$26.86	\$26.86	Welch Allyn	indef	N	2	

PROPAQ 206EL WITH PULSE OXIMETRY CONSUMABLES RESUPPLY

NSN	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONUS Ship Time, weeks	NOTES
6515014128673	Paper, Printer, Roll	01	10PG	008-0040-98x	\$27.00	\$27.00	Welch Allyn	Indef	N	2	
6515 015195855	Electrodes Gel	05	30pg	6200-11	\$26.86	\$26.86	Welch Allyn	indef	N	2	FINGER 6 PATIENTS
6515012714894	SENSOR,SPO2,FING ER DISPOSABLE	01	24s PG	D-25	\$.394.18	\$394.18	NELLCOR	indef	N	2	

The Propaq 206 monitors are shipped complete with adult, pediatric, and neonatal monitoring capability. The monitor includes 3 or 5 lead ECG (user specified), NIBP, 2 IBP, 2 TEMP, Respiration and Nellcor SpO₂. Includes a 3 year warranty.

MONITOR VITAL SIGNS W/SPO²/,WCAPNO <u>TOC</u>

WELCH ALLYN

PROPAQ 206EL MONITOR W/SPO2 AND CAPNOGRAPHY

(Side stream, mainstream or dual)

Manufacturer's PHONE: (503) 530-7500 FAX (503) 530-4910

Website:http://www.welchallyn.com

AAC "W" NSN 6515-01-465-3289 AAC "J" NSN 6515-01-432-2711

UA's: 2267, M301, M308, M309

USAMMA POC: Equipment Acquisition Division, 301 619-4060, DSN 343-4060 UNIT PRICE: SPO², Capnography (Sidestream, mainstream or dual \$10,548) System Description: Rugged, lightweight, portable vital signs monitor for field use.

TEST PERFORMED

Heart/Pulse rate 3-5 Lead ECG Non Invasive BP 2 Channel Invasive BP Temperature Pulse Oximetry Respiration

ADVANTAGES


Motion tolerant monitoring. Small, lightweight Ease of use Modular Ruggedized Automatic sensor detection

PROPAQ 206 EL VITAL SIGNS MONITOR FRONTAL VIEW




Operator Familiarization: CD-ROM is available.

PROPAQ 206 EL VITAL SIGNS MONITOR LEFT SIDE VIEW

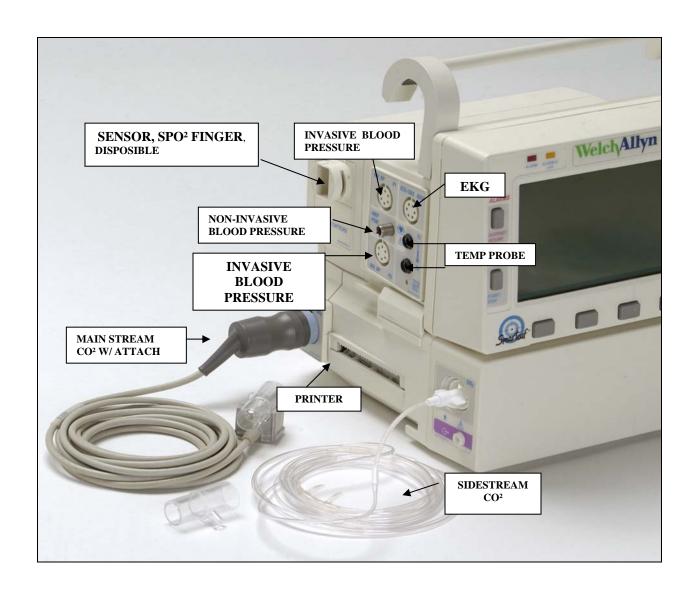


PROPAQ 206 EL VITAL SIGNS MONITOR RIGHT SIDE VIEW

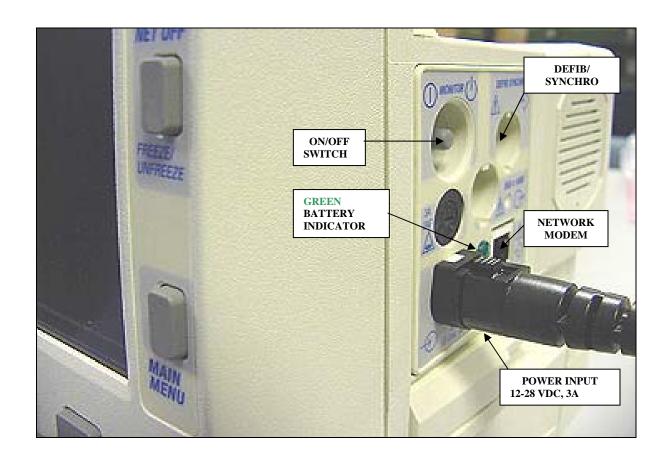



ECG CABLE, 5 LEAD, (008-0313-00)



NIBP CUFF, ADULT (008-0628-00)



CABLE, PULSE OXIMETRY, 8 FEET, (008-0742-00)



 $\begin{array}{c} HOSE,\,NIBP\,ADULT/PEDIATRIC,\\ (008-0238-00) \end{array}$




AC POWER ADAPTER, (503-0054-00)




NIBP CUFF KIT ADULT, (008-0324-00)



DURASENSOR REUSABLE FINGER, SPO², (900-0021-00)



NIBP CUFF KIT PEDIATRIC, (008-0324-00)



KIT NIBP CUFF THIGH, (008-0324-00)



TEMPERATURE PROBE, (008-0419-01)



SIDE STREAM CANNULA CO² W/WATER TRAP ADULT (008-0769-00) CHILD (008-0770-00)



 CO^2 Sensor Airway Adapter with 10' cable for Mainstream 008-0502-00

 CO^2 Airway Adapters Single Pt use for Mainstream only 008-0367-00



MILITARY REUSABLE CONTAINER (008-0586-00) WITH ACCESSORIES SHOWN

PROPAQ 206EL PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	9.6"
	Width	8.2"
	Depth	7.6"
Weight		
		13.5 lbs
Operating Temperature		0° to 40°C degrees
Storage Temperature		-20° to 60°C degrees
Humidity non-condensing		15% to 95%
Power Requirements		110/208VAC=/- 10%, 50/60 HZ
		.06 KW
		12-23 VDC

PROPAQ 206EL MONITOR WITH PULSE OXIMETRY ACCESSORIES START-UP

		•			1		li .				
						UNIT			Shelf Life, month	Refrig	CONUS Ship Time,
NSN	NOTES	Nomenclature	QTY	UI	PART#	PRICE	Total Price	MFG	s	Y/N	weeks
NO STK #								Welch			
NEEDED	Incl W/ NSN	SPO2 OPTION	01	EA	01040003	\$1,763.00	\$1,763.00	Allyn	Indef	N	2
NO STK #	T 1337/NICAL	RESPIRATION	0.1	F.4	01040010	EDEE	EDEE	Welch	T 1 C	N.T.	2
NEEDED	Incl W/ NSN	OPTION	01	EA	01040010	FREE	FREE	Allyn	Indef	N	2
NO STK #	I1 XV/ NICNI	DDINTED	0.1	EA	01040665	¢105400	¢1054.00	Welch	T., J. C	N.T	2
NEEDED	Incl W/ NSN	PRINTER	01	EA	01040665	\$1054.00	\$1054.00	Allyn	Indef	N	2
NO STK # NEEDED	Incl W/ NSN	COMMUNICATION OPTION	01	EA	01040011	\$419.00	\$419.00	Welch Allyn	Indef	NT	2
NEEDED	IIICI W/ INSIN	MILITARY	01	EA	01040011	\$419.00	\$419.00	Welch	muei	IN	2
6515015189559	Incl W/ NSN	CONTAINER	01	EA	008-0586-00	\$576.40	\$576.40	Allyn	Indef	N	2
0313013107337	mer w/ rtsrt	Pulse oximetry probe	01	L2 1	000 0300 00	φ370.40	ψ370.40	7 tilly li	macı		
		reusable durasensor						Welch			
6515015190163	Incl W/ NSN	DS100A	01	EA	900-0021-00	\$225.00	\$225.00	Allyn	Indef	N	2
6515015189839	Incl W/ NSN	Temp Probe General Purpose Reusable Adult Autoclavable, YSI #401 AC	01	EA	008-0419-01	\$68.00	\$68.00	Welch Allyn	Indef	N	2
		NIBP Cuff, adult									
CE1E01E190EEC	I1 XV/ NICNI	standard reusable w/	01	E.A	000 0620 00	¢25.00	¢25.00	Welch	T., J. C	N.T	2
6515015189556	Incl W/ NSN	"twist lock" connector	01	EA	008-0628-00	\$35.00	\$35.00	Allyn	Indef	IN	2
6515 015190962	(must designate 5 lead)Incl W/ NSN	ECG Cable, 5 lead, 10 foot, W/5 attached lead wires, snap	01	EA	008-0313-00	\$91.00	\$91.00	Welch Allyn	Indef	N	2
6515 015191102	Incl W/ NSN	AC Adapter for recharging battery, 120 VAC 60 HZ	01	EA	503-0054-00	\$122.00	\$122.00	Welch Allyn	Indef	N	2
6515015039828		Power Cord, Hospital						Welch			
	Incl W/ NSN	Grade 100-120 VAC	01	EA	008-0333-00	\$23.00	\$23.00	Allyn	Indef	N	2
6515015010661	Incl W/ NSN	Cable, Pulse Oximetry, 8 foot extension	01	EA	008-0742-00	\$65.00	\$65.00	Welch Allyn	Indef	N	2
6515014365080		Hose, NIBP						Welch			
	Incl W/ NSN	Adult/Pediatric	01	EA	008-0238-00	\$20.00	\$20.00	Allyn	Indef	N	2
6515 015191100	Incl W/ NSN	Cuff Kit, NIBP adult reusable w/ "twist lock" connector	01	EA	008-0324-00	\$95.00	\$95.00	Welch Allyn	Indef	N	2
		Technical Reference						*** * * *			
7610015190140	In al XII/ NICAI	Guide ((Service	02	E 4	010 1004 00	¢45.00	20,002	Welch	In d - f	NI	
7610015189140	Incl W/ NSN	Manual), CD	02	EA	810-1084-00	\$45.00	\$90.00	Allyn	Indef	IN	2
7610015189122	Incl W/ NSN	Operator's Manual	02	EA	810-0867-00	\$45.00	\$90.00	Welch Allyn	Indef	N	2
7010013103122	THET AN LIGHT	Operator s Manual	02	LA	010-0007-00	φ + 3.00	φ30.00	Anyn	muei	1.4	
7610015189142	Incl W/ NSN	Video, In-service North America (NTSC)	01	EA	810-0835-00	\$27.00	\$27.00	Welch Allyn	Indef	N	2

PROPAQ 206EL WITH PULSE OXIMETRY CONSUMABLES START-UP

NSN	NOTES	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONU S Ship Time, weeks	NOTES
NO STK# NEEDED	Incl W/ NSN	Paper, Printer, Roll	03	EA	x			Welch Allyn	Indef	N	2	
6515015189543	Incl W/ NSN	Electrodes Gel	01	5pg	6200-10	\$5.00	\$5.00	Welch Allyn	indef	N	2	FINGER 1 PATIENT
6515 012714894	Incl W/ NSN	Sensor SPO2 finger disposable	01	3 pg	D-25 x	\$394.18	\$394.18	Welch Allyn	indef	N	2	
6515014128673	Incl W/ NSN	Paper, printer Roll	01	10pg	008-0040-98	\$27.00	\$27.00	Welch Allyn	indef	N	2	
6515 015195855	Incl W/NSN	Electrodes, Gel	02	30pg	6200-11	\$5.00	\$5.00	Welch Allyn	indef	N	2	
6515014470079	Incl W/ NSN	Adapter airway CO ² single PT USE	01	10/pg	008-0263-00	\$163.25	\$163.25	Welch Allyn	indef	N	2	

PROPAQ 206EL WITH PULSE OXIMETRY CONSUMABLES RESUPPLY

NSN	Nomenclature	QTY	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, month s	Refrig Y/N	CONUS Ship Time, weeks	NOTES
6515014128673	Paper, Printer, Roll	01	10PG	008-0040-98x	\$27.00	\$27.00	Welch Allyn	Indef	N	2	
6515 015195855	Electrodes Gel	05	30pg	6200-11	\$5.00	\$25.00	Welch Allyn	indef	N	2	FINGER 6 PATIENTS
6515012714894	Sensor ,SPO2,Finger Disposable	01	24s PG	D-25	\$.394.18	\$394.18	NELLCOR	indef	N	2	
6515014470079	Adapter airway CO ² single PT USE	01	10/pg	008-0263-00	\$163.25	\$163.25	Welch Allyn	indef	N	2	

The Propaq 206 monitors are shipped complete with adult, pediatric, and neonatal monitoring capability. The monitor includes 3 or 5 lead ECG (user specified), NIBP, 2 IBP, 2 TEMP, Respiration and Nellcor SpO₂. Includes a 3 year warranty.

VITAL SIGNS MONITOR WITH CAPNOGRAPHY ADDITIONAL CONSUMABLES RESUPPLY

NSN	NOTES	Nomenclature	PN	QТΥ	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515 015224081	INCL. W/NSN		008- 0261-00	02	03 PG	\$230.65	\$691.95	Welch Allyn	N	N	2
6515 014470079	INCL. W/NSN		008- 0263-00	02	10 PG	\$171.86	\$343.72	Welch Allyn	N	N	2
6515 015224095		1 0	008- 0769-00	1	25	\$317.00	\$317.00	Welch Allyn	N	N	2
6515 015224101	INCL. W/NSN		008- 0770-00	1	25	\$328.00	\$328.00	Welch Allyn	N	N	2
6515 015224084	INCL. W/NSN	CO2 Airway Adapters Single Pt use for Mainstream only	008- 0367-00	01	24	\$288.00	\$288.00	Welch Allyn	N	N	2

ADDITIONAL ACCESSORIES

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515 014755511	INCL. W/NSN	CO2 Sensor Airway Adapter with 10' cable for Mainstream	008-0502- 00		EA	\$1899.45	\$1899.45	Welch Allyn	N	N	2
6515014468319		Adapter CO ² Airway Patient Vital Signs Monitor Adult/Pediatric	008-0132- 00		EA	\$144.05		Welch Allyn	N	N	2
6515014466260		CO ² Sensor Airway Adapter w/10 ft cable for Mainstream	008-0130- 01		EA	\$2,016.63		Welch Allyn	N	N	2
6515013960711		Paper EKG 100 ft yd L X 60MM w/100 rolls	008-0040- 99		EA	\$271.35		Welch Allyn	N	N	2
6515014346106		Cable Monitoring Set Arterial Pressure Reusable 15 ft	42661-04	01	EA	\$118.58	\$118.58	Abbott	N	N	2
6515014341421		Monitoring Set Arterial Pressure Sterile /20s	42589-05	02	PG	\$871.81	\$1,743.62	Abbott	N	N	2

LIFE-TECH, INC MODEL # MS-IV

Distributor's PHONE: (540) 662-8000 FAX (540) 662-3803

Website: http://www.life-tech.com

AAC "W" ITEM NSN 6515-01-208-0576 AAC "J" ITEM NSN 6515-01-397-5212

UA's:2267,M301

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$161.55

Features: The use of a peripheral nerve stimulator provides useful information:

- during operations in which non-depolarizing neuromuscular blocking agents are
 used to indicate the degree of blockade and thus the indication for additional
 doses of muscle relaxant.
- at the end of the operation to ensure that muscle power is fully restored by appropriate doses of neostigmine and atropine before consciousness is restored. It is very distressing to a conscious patient when neuromuscular blockade is incompletely reversed.
- Clinical indication of reversal of neuromuscular blockade is given by the patient's power in muscles supplied by the cranial nerves e.g. to open his eyes, put out his tongue, hold his head up, as well as to breathe adequately and to cough. Peripheral nerve stimulation may be helpful in assisting localization during nerve blocks with local analgesia.



Life-Tech MS IV



Life-Tech MS IV Characteristics

Dimensions	Height	4.2"
	Width	.8"
	Depth	2.4".
Voltage	9 VDC (battery)	
Weight	5 ounces	
Output Power	0 to 50 milliamperes maximum	
Twitch	2 pulses per second	
Tetanus	50 to 100 pulses per second	
Stimulus Pulse	.22 milliseconds, square wave monophasic	

Life-Tech MS-IV ACCESSORIES (STARTUP)

											CONUS
									Shelf		Ship
						Unit	Total		Life,	Refrig	Time,
NSN	NOTES	Nomenclature	PN	QTY	UI	Price	Price	MFG	months	Y/N	weeks
		Battery, 9 volt, non-						NEXTELL			
6135009735632	Included W/NSN	rechargeable,	0226	1	EΑ	\$12.48	\$12.48	SALES	Indef	N	2
			DP-					Life-Tech,			
6515015224238	Included W/NSN	Bipolar probe	MTP	1	EΑ	\$24.45	\$24.45	Inc.	Indef	N	2
								Life-Tech,			
6515015221842	Included W/NSN	Carrying Case	CC-M	1	EΑ	\$10.20	\$10.20	Inc.	Indef	N	2
		2' Extension Leads	EL-					Life-Tech,			
6515015221838	Included W/NSN	with Alligator Clips	2MTP	1	EΑ	\$20.45	\$20.45	Inc.	Indef	N	2

TABLE OPERATING FIELD

ARIZONA INDUSTRIES FOR THE BLIND

Manufacturer's PHONE: (602) 269-5131 FAX: (602) 269-9462

Website: http://www.de.state.az.us/aib/

AAC "L" NSN: 6530-01-321-5592

LIN: T00578

UA's: 0267, 2267, M316

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$5,586.00









INTRODUCTION

The field operating table is manufactured by Arizona Industries for the blind at 3013 W Lincoln street Phoenix, AZ 85009-5699 Phone: (602) 269-5131 FAX: (602) 269-9462, the current cost for the unit is \$5,586.00 it is an AAC-L item and carries a LIN: T00578.

The field operating table is a portable type that is quickly assembled and is used for surgical procedures in the far forward operations, the table contains 2 adjustable 100 watt halogen surgical lights, there is no patient transfer required, patient remains on a litter that rests on the top of two rail assemblies.

The components are easily detached as needed from the table, the table measures 53 inches in length, 26 inches wide and 25 to 33 inches working height when assembled, the unit weight when unpacked from the container is 80 pounds, also the table is capable of using all military litters.

COMPONENT LIST

The OR table is issued with the following items:

QTY	ITEM DESCRIPTION	NSN			
2	Right corner leg assemblies	6530-01-455-7585			
2	Left corner leg assemblies	6530-01-455-7387			
8	Extrusion bars	6530-01-455-7634			
4	Rail assemblies	6530-01-455-7638			
2	Mesh shelf assemblies	6530-01-453-9076			
1	Vinyl drain pad	6530-01453-7698			
2	Litter rails	6530-01-455-7642			
1	Bag frame	6530-01-455-7646			
1	Weld tray assembly	6530-010455-7653			
2	Clamp assemblies	6530-01-455-7657			
1	Tray clamp assembly	6530-01-455-7907			
1	Support posts	6530-01-455-7662			
1	Tray post	6530-01-455-7685			
1	Guide weldment	6530-01-455-7690			
2	Armboard assemblies	6530-01-453-7696			
1	Tray-stand assembly	6530-01-455-7692			
1	Tray instrument	6530-00-793-9570			
2	Arm assemblies	6530-01-455-7695			
3	IV poles	6530-01-455-7860			
2	Strap assemblies	6530-01-455-7865			
2	Halogen Lamp assemblies (surgical lights)	6240-01-455-7873			
2	Wrenches for adjustment of the surgical lights	5120-01-455-7901			
3	Lights (spare bulbs)	6240-01-463-7057			
1	Reusable container	6530-01-432-3173			

CHARACTERISTICS

Dimensions	Height .	33"		
	Width	26"		
	Depth	53"		
Weight		80 lbs		
Storage Temperature		-35° to 160°F		
Operating Temperature		-35° to 160°F		
Humidity		5-95%		
(non-condensing)				
Power Requirements	120/230 volts, .625 amps	75 Watts		


ASSEMBLY INSTRUCTIONS


The step by step instructions are provided to assist in assembly, part identification, and repackaging of the table back into the reusable storage container. To prepare the table for assembly do the following:

- 1. Open the storage container and remove the top tray and center tray from the container.
- 2. Complete an inventory of the Operating Table components.
- 3. Remove all of the components from the storage container.
- 4. During the removal of the Operating Table components inspect each item for damage.
- 5. When removing the Surgical Light assemblies use caution not to lay them where they could accidentally be knocked off and get damaged.

(NOTE)

Be very careful when handling the Surgical Lights if dropped there is a possibility that the circuit board in the arm assembly could get damaged.





The circuit board is located in the arm assembly of the surgical light.

JT 101 Circuit Board

To assemble and set up the operating table follow the instructions beginning on the next page.

ASSEMBLY INSTRUCTIONS

Step 1: Obtain the 4 OR table legs.





Step 2: Obtain 4 of the short connecting rails.



Step 3: Attach the 4 short connecting rails to the end side of the table legs.



Step 4: Obtain the 4 remaining short connecting rails and the 4 long connecting rails.



Step 5: Connect the 4 long and the 4 short connecting rails together making 4 single long connecting rails.



Step 6: Attach the lower mesh shelf to the lower connecting rails.



Step 7: Attach the upper and lower connecting rails to the legs one end at a time.



Step 8: Attach the connecting bars to the remaining legs and the lower mesh shelf Velcro on each end of the OR table.



Step 9: Attach the drain pad to the upper connecting bars of the OR table.



Step 10: Attach the stretcher rails to the OR table.



Step 11: Attach the 2 clamps to the OR table side connecting bar.





Step 12: Obtain the 2 silver support posts and place into the 2 clamps.



Step 13: Obtain the arm board assemblies and place onto the support posts.



**Upon completion of steps 11, 12, and 13 the OR table should appear as below.



Step 14: Obtain the tray clamp assembly and attach to the OR table upper rail on the opposite end of the arm boards.



Step 15: Obtain the tray post and insert into the clamp.



Setp16: Obtain the tray stand assembly and position onto the tray post.




Step 17: Obtain the tray and place on top of the tray stand assembly.



**The OR table should appear as below at this point of assembly.



Step 18: Obtain the two arm assemblies and place into the end OR table upper legs.





Step 19: Obtain the IV poles and insert into the arm assembly.



Step 20: Obtain the surgical lights and insert into the arm assembly



**At this point the OR table should appear as below.



Step 21: Obtain the bag frame assembly and attach to the end of the OR table.





Step 22: Obtain the tray assembly and insert onto the OR table end.





**This completes the OR table set up. the OR table should appear as below.



TABLE OPERATING FIELD ACCESSORIES (START-UP)

				ı						
										CONILIC
										CONUS Ship
NGN	DIGI WATEN	N. 1.	OTT	* **	D 4 D 5 11	TT 1: D 1	m . 1 D !	MEG	Refrig	Time,
NSN	INCL W/NSN	Nomenclature	QTY	UI	PART #	Unit Price	Total Price	MFG Arizona	Y/N	weeks
6530014557585	INCL W/NSN	Corner (R) Assembly	2	EA	40212	\$633.20	\$1266.40	Industries	N	
6530014557387	INCL W/NCN	Corner (L) Assembly	2	EA	40213	¢621.52	\$1263.04	Arizona	N	
0330014337387	INCL W/NSN	Corner (L) Assembly		EA	40213	\$631.52	\$1203.04	Industries Arizona	IN	
6530014557634	INCL W/NSN	23.62 Extrusion	8	EA	30373	\$21.28	\$170.24	Industries	N	
6530014557638	INCL W/NSN	Rail Assembly	4	EA	40217	\$100.04	\$400.16	Arizona Industries	N	
0000011007000	INCE WINDIN	Tuni i issemely			.0217	φ100.01	ψ.100110	Arizona		
6530014539076	INCL W/NSN	Shelf	2	EA	60157	\$60.52	\$121.04	Industries	N	
								A:		
6530014557642	INCL W/NSN	Rail Assembly	2	EA	30381	\$116.00	\$232.00	Arizona Industries	N	
					20202		000.00	Arizona		
6530014557646	INCL W/NSN	Bag Frame	1	EA	30393	\$88.00	\$88.00	Industries Arizona	N	
6530014557653	INCL W/NSN	Tray Assembly (weld)	1	EA	30392	\$206.00	\$412.00	Industries	N	
6530014557657	INCL W/NSN	Clamp Assembly	2	EA	40220	\$352.22	\$704.44	Arizona Industries	N	
0330014337037	INCL W/NSIN	Clamp Assembly		LA	40220	φ332.22	\$704.44	Arizona	11	
6530014557907	INCL W/NSN	Tray Clamp Assembly	1	EA	40221	\$435.64	\$435.64	Industries	N	
6530014557662	INCL W/NSN	Support Post	2	EA	30354	\$35.72	\$71.44	Arizona Industries	N	
					20204	007.00	007.00	Arizona		
6530014557685	INCL W/NSN	Tray Post	1	EA	30391	\$97.20	\$97.20	Industries Arizona	N	
6530014557690	INCL W/NSN	Guide Weldment	1	EA	30388	\$68.48	\$68.48	Industries	N	
6530014537696	INCL W/NSN	Armboard Assembly	2	EA	40218	\$154.68	\$309.36	Arizona Industries	N	
0330014337090	INCL W/NSN	Alliboard Assembly		LA	40218	\$154.00	\$309.30	Arizona	11	
6530014557692	INCL W/NSN	Tray Stand Assembly	1	EA		\$138.64	\$138.64	Industries	N	
6530007939570	INCL W/NSN	Tray Instrument	1	EA	RRT006 36	\$113.24	\$113.24	Arizona Industries	N	
				<u>.</u>				Arizona		
6530014557695	INCL W/NSN	Arm Assembly	2	EA	30379	\$82.28	\$164.56	Industries Arizona	N	
6530014557860	INCL W/NSN	IV Pole	3	EA	40222	\$161.64	\$484.92	Industries	N	
6530014557865	INCL W/NSN	Strap	2	EA	30394	\$6.48	\$12.96	Arizona Industries	N	
0330014337803	INCL W/NSIN	Биар		LA	HAL-A-	φυ.40	\$12.70	Arizona	11	
6240014557873	INCL W/NSN	Halogen Lamps	2	EA	L-103-A	\$696.08	\$1392.16	Industries	N	
5120014557901	INCL W/NSN	Wrench	2	EA	20404	\$22.22	\$44.44	Arizona Industries	N	
C2 4001 4 52727					6445DA	#22.CC	064.00	Arizona		
6240014637057	INCL W/NSN	Lamp Bulb	2	EA	X	\$32.00	\$64.00	Industries Arizona	N	
6530014537698	INCL W/NSN	DRAIN PAD	1	EA		\$209.84	\$209.84	Industries	N	
					AL4024- 1305-	\$2066.00				
					10130-	Ψ2000.00		Arizona		
6530014323173	INCL W/NSN	Container, Storage	1	EA	200		\$2066.00	Industries	N	

COMPONENT DESCRIPTIONS

Corner (R) Assembly 2 each, Part Number 40212 NSN: 6530-01-455-7585



23.62 Extrusion 8 each, Part Number: 30373 NSN:6530-01-455-7634



Shelf 2 each, Part Number: 60157 NSN: 6530-01-453-9076




Corner (L) Assembly 2 each, Part Number 40213 NSN: 6530-01-455-7387



Rail Assembly 4 each, Part Number: 40217 NSN: 6530-01-455-7638



Rail Assembly 2 each, Part Number: 30381 NSN: 6530-01-455-7642




Bag Frame 1 each, Part Number: 30393 NSN: 6530-01-455-7646



Clamp assembly 2 each, Part Number: 40220 NSN:6530-01-455-7657



Support Post 2 each, Part Number: 30354 NSN: 6530-01-455-7662



Tray Assembly (weld)
1 each, part Number: 30392
NSN: 6530-01-455-7653



Tray Clamp Assembly 1 each, Part Number: 40221 NSN:6530-01-455-7907



Tray Post 1 each, Part Number: 30391 NSN: 6530-01-455-7685




Guide Weldment 1 each, Part Number: 30388 NSN: 6530-01-455-7690



Tray Stand Assembly 1 each, Part Number: 40219 NSN: 6530-01-455-7692



Arm Assembly 2 each, Part Number: 30379 NSN: 6530-01-455-7695



Armboard Assembly 2 each, Part Number: 40218 NSN: 6530-01-453-7696



Tray Instrument 1 each, Part Number: 9570 NSN: 6530-00-793-9570



IV Pole 3 each, Part Number: 40222 NSN: 6530-01-455-7860



Strap 2 each, Part Number: 30394 NSN: 6530-01-455-7865



Wrench 2 each, Part Number: 20404 NSN:5120-01-455-7901



Halogen Lamps 2 each, Part Number: 64450AX NSN: 6240-01-455-7873



Lamp Bulb 2 each, Part number: 75W/12V-GY6.35 NSN: 6240-01-463-7057



Drain Pad 1 each, Part Number: 60167 NSN: 6530-01453-7698



The Storage Container NSN: 6530-01-432-3173

The table when disassembled stores into a reusable carrying container that weighs approximately 200 pounds when packed. The cost of the storage container is \$1098.00.



STORAGE CONTAINER




TOP TRAY



CENTER TRAY



BOTTOM BASE CUSHION

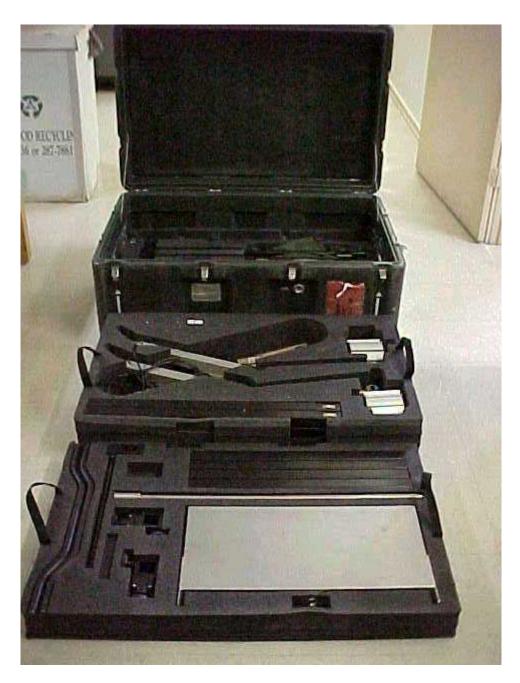

The container has custom made inserts to cushion the components and accessories of the operating table and should not be removed.

NOTE


(This is a Custom made Storage Container for the storage of the operating table only).

DISASSEMBLY AND REPACKING INSTRUCTIONS

To disassemble the operating table reverse the order in which the table was assembled. Again, exercise care to ensure that fragile components are not damaged as the table is disassembled. Before inserting the components of the table back into the case make sure that each component is thoroughly cleaned.

Note that the case is manufactured with trays each having inserts for each component of the table built directly into them. By replacing the components into the proper insert each will be protected during transport. Beginning on the next page are illustrations of each tray indicating exactly where each component is to be inserted so that maximum protection for each item is provided.


TOP TRAY LAYOUT

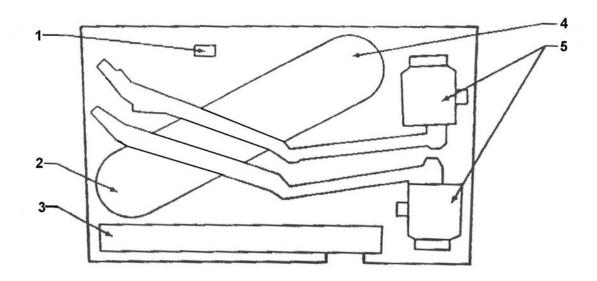

Item No.	Description
1	Bulbs
2^{1}	Shelf
3	Rail Assembly
4	Armboard Assembly
5	Lights, Reynolds Mach and Tool, Melrose, IL 60160

Note that item #2 is in the tray insert beneath item #4


CENTER TRAY LAYOUT

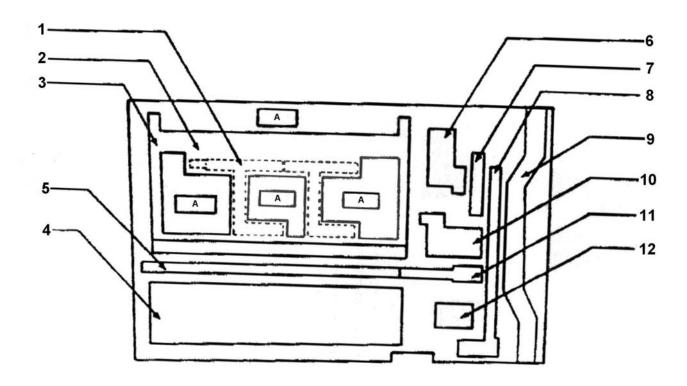

Item No.	Description
1	Arm Assembly
2	Tray Assembly
3	Bag Frame Assembly
4	20.62 Extrusion
5 ¹	Support Post
6	Clamp Assembly
7	Wrench
8	Guide Weldment
9	Rail
10	Clamp Assembly
11	Tray Post
12	Straps
A	A clamp fits into each insert marked with an "A"

Note that items 5 and 11 fit into the same insert

BOTTOM CUSHION INSERT LAYOUT

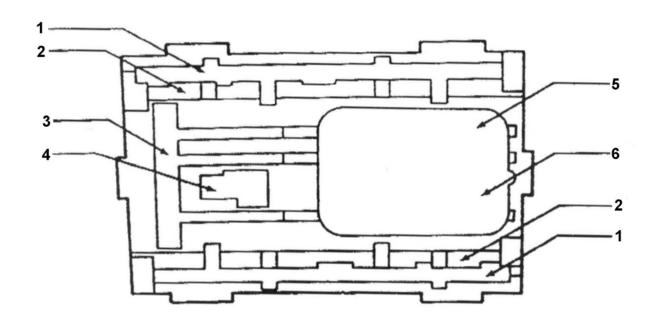

Item No.	Description
1	Corner Assembly, Right Side
2	Corner Assembly, Left side
3	I.V. Poles, 3 each
4	Tray Clamp Assembly
5	Tray Stand Assembly
6	Tray, NSN 6530-00-793-9570

WELCH ALLYN MODEL 98060

Manufacturer's PHONE: (315) 685-4100 FAX (315) 683-3361

Website: http://www.welchallyn.com

AAC "D" ITEM NSN 6515-00-550-7199

UA's:0261,0267,2261,2267,M301,M308,M309,M310,M311,M313,M315,M513,M713

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$169.09

System Description: 2.5volt diagnostic set with ophthalmoscope, operating otoscope, and "D" size battery handle.

Basic medical diagnostic set, complete with power handle and case. The diagnostic instruments feature a standard halogen lamp for better illumination, resulting in a better examination. The set includes a 2.5 volt Ophthalmoscope providing 28 lenses and 6 standard apertures. Operating Otoscope with an open system and rotatable lens and speculum for convenient procedures. 2.5 volt D size battery handle, with chrome-plated brass knurled finish, is ideal for situations where standard outlets are not available.

Figure 1. Otoscope and Ophthalmoscope Set



Diagnostic Set Characteristics

Dimensions	Height, 4"
	Width, 6"
	Depth, 5"
Voltage	2.5 VDC ("D" cell battery)
Weight	2.2 lbs

DIAGNOSTIC SET ACCESSORIES (STARTUP)

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6135-00-835-7210	Battery, 1.5 volt D size, non- rechargeable	MN1300	1	12 PG	\$10.41	\$10.41	Duracell.	36 months	N	2
6240-01-300-3811	2.5volt halogen lamp	04400	1	6 PG	\$13.11	\$13.11	Welch- Allyn.	Indef	N	2
6515-00-216-1983	Reusable ear specula, 3mm	22003	1	ΕA	\$1.67	\$1.67	Welch-Allyn	Indef	N	2
6515-01-144-2612	Reusable ear specula, 4mm	22004	1		\$1.67	\$1.67	Welch-Allyn	Indef	N	2
6515-01-239-8303	Disposable otoscope specula, 3mm	52133	1	500 PG		\$24.20	Welch-Allyn	Indef	N	2
6515-01-169-7495	Disposable otoscope specula, 4mm	52134	1	500 PG		\$26.49	Welch-Allyn	Indef	N	2
	Disposable otoscope specula, 5mm	52135	1	500			Welch-Allyn	Indef	N	2

AIRSEP NEWLIFE ELITE MODEL # ELITE

Manufacturers' PHONE: (716) 691-0202 FAX (716) 691 0174 Website: http://www.portablenebs.com/concentrator.htm

AAC "W" ITEM NSN 6515-01-383-1052 AAC "J" ITEM NSN 6515-01-327-6798

UA's: 0267, 2267,

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$919.04

System Description: Produces from 1/2 to 5 liters per minute of therapeutic oxygen, purity levels of up to 95.5%. Large, easy-to-read flow meter with back-lines for accurate flow settings. Built-in handles make it easy to move or lift. Large casters glide easily over virtually any flooring surface. Uses a long-life Thomas Nexus compressor designed to provide over 20,000 hours of use without servicing. Safety features include high and low pressure alarms, a loss-of-power alarm, and an optional oxygen purity alarm. On properly equipped units, the purity alarm constantly monitors the oxygen purity, ensuring it remains in the therapeutic range. Also includes a high-temperature shut-off switch outside the compressor, guarding against overheating.



AIRSEP OXYGEN CONCENTRATOR

Dimensions	Height, in.	28.5
	Width, in.	15.7
	Depth, in.	14.5
Weight, lbs.	54	
Power Consumption	350 Watts	
Power Requirements	120 VAC, 60 Hz, 4 Amps	
Alarms	Power failure	
	High and low pressure	
	Temperature	
	Battery test	
	Low purity (Oxygen monitor with optional	
	EcoCheck)	
Performance:		
- at 1-3 LPM	95% +/- 3%	
- at 4 LPM	92% +/- 3%	
- at 5 LPM	90% +/- 3%	

AIRSEP OXYGEN CONCENTRATOR CONSUMABLES

NSN	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CON US Ship Time, weeks	USAMMC E Ship Time, weeks	NOTES
	Mask, oro-nasal, child			50	# 400.0	# 400 0	Medline					
6515011535584		1042	1	P G	\$100.2 3	\$100.2	Industries	Indef	N			
6515013656206	Mask, oro-nasal, pediatric	1011	1	50 P G	\$109.7 2	\$109.7 2	Elite Medical Products	Indef	N			
6515011405343	Mask, rebreathing, adult	1009		50 P G	\$93.25	\$93.25	Metropolitan Medical	Indef	N			
6515014580522	Nasal Cannula, Oxygen, 84inch non- flared	1103	1	50 P G			Hudson Oxygen Therapy Sales	Indef	N			

DATEX OHMEDA MODEL 5120

Manufacturer's PHONE: (608) 221-1551 FAX (608) 221-4383

Website: http://www.datexohmeda.com

AAC "L" ITEM NSN 6515-01-279-6450

UA's: 0267, 2267,

USAMMA POC: Equipment Acquisition Division, (301) 619-4060,DSN 343-4060 UNIT PRICE: \$711.45

System Description: Small, lightweight monitor used in conjunction with the Datex-Ohmeda Anesthesia Drawover measuring O2 concentration.

Tests performed:

1) O2 concentrations



DATEX-OHMEDA 5120 O2 MONITOR PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	6.75"
	Width	3.5"
	Depth	2.25"
Weight	1.3 lbs	
Operating Towns are true.	5° to 40 ° C	41° to 104° F
Temperature	0 to95% non	
Operating Humidity	condensing	
Storage Temperature	-20°F to 120°F	
Storage Humidity	55% ± 5	
Power Requirements	Battery Powered 3 C type Batteries	Battery Life (Nominal) 500 hrs

DATEX-OHMEDA 5120 O2 MONITOR CONSUMABLES PACKAGE

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515014344231	Included W/NSN	Oxygen Sensor Cartridge	237-2034-700	01	ea	\$144.00	\$144.00	Datex-Ohmeda	N/A	N	
6515013821877		Sensor Probe Cap	6050-0005- 438	01	ea		\$8.00	Datex-Ohmeda	N/A	N	
6515013821927	Included W/NSN		0212-0763- 100	01	ea	\$5.65	\$5.65	Datex-Ohmeda	N/A	N	
6135009857846		BATTERY ALKALINE 1.5 VOLT C CELL 12 PER PACKAGE	EN93	12	pg	\$7.40	\$7.40	Danbury Union Carbide	N/A	N	

DATEX-OHMEDA 5120 O2 MONITOR ACCESSORIES PACKAGE

NSN	NOTES	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, month s	CONU S Ship Time, weeks
NO STK # NEEDED	Included W/NSN	-1 -7 -1 - 7	6050-0005- 456	01	ea	unk	unk	Datex- Ohmeda		
6515 013178482	Included W/NSN	Sensor Probe with 6 ft probe	6050-0005- 406	01	Ea	\$85.64	\$85.64	Datex- Ohmeda		
NO STK # NEEDED	Included W/NSN	Mounting C Clamp	0237-2032- 700	01	ea	\$155.56	\$155.56	Datex- Ohmeda		
6625013829294	Included W/NSN		0237-2031- 800	01	Ea	\$12.56	\$12.56	Datex- Ohmeda		
6515013821952	Included W/NSN		0237-2040- 880	01	ea	\$27.54	\$27.54	Datex- Ohmeda		

ALARIS MEDSYSTEM 111 MODEL2865B

Manufacturer's PHONE: (858) 458-6003, Fax (858) 458-7507

Website: http://www.alarismed.com

AAC "W" ITEM NSN 6515-01-381-4456 AAC "J" ITEM NSN 6515-01-486-4310

UA's: 0257, 2257, 2267, M308, M309, M310

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$5,704.51

System Description: Three independent infusion channels for the delivery of a wide range of fluids from various containers including syringes. Also provides a secondary delivery of intermittent medications, fluid challenges, or loading doses from each channel. Each line can deliver a separate drug, helping to eliminate incompatibility and drug sequencing concerns.

Advantages: 1. Rapid on-line titration w/o interrupting flow. 2. Configurable air-in-line thresholds, rate and volume ranges, occlusion alarm settings and KVO rates. 3. Titration of drugs in either dose or volumetric rate. 4. Streamlined PMCS and calibration processes.





Administrative Set Piggy Back (72213N) NSN 6515014164032 (100 PG)



Administrative Set Main Stream Line (28034) NSN 6515014348712 (50 PG)

IV PUMP PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	7.9"
	Width	6.0"
	Depth	2.1"
Weight		3.6 lbs
Internal Battery		Main Rechargeable Nicad Battery, Memory Backup
		Nonrechargeable Lithium
Battery Capacity		Minimum 6 hours with all three channels at 125 ml/hr
Operating Temperature		
		50°F to 104°F
Humidity		90 %
Power Requirements		110/120VAC/60HZ
_		6 WATTS AC POWER

IV PUMP CONSUMABLES START-UP

NSN	Nomenclature	PN	QTY	UI	PART#	UNIT PRICE	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515014348712	Administration set		01	50PG	28034	\$399.11	\$399.11	ALARIS MEDICAL	Indef	N	2
6515014164032	Administration set		01	100PG	72213N	\$184.12	\$184.12	ALARIS MEDICAL	Indef	N	2

PUMP, INTRAVENOUS INFUSION TOC

INFUSION DYNAMICS POWER INFUSER MINIRAPID IV MODEL # M100B-3A

Manufacturers' PHONE: (610) 941-0136 FAX (610) 629-6000

Website: http://www.infusiondynamics.com

AAC "W" ITEM NSN 6515-01-485-4362 AAC "J" ITEM NSN 6515-01-498-2252

UA's: 2256, 2257, 2261, 2264, 2267, 3256, 3264, M308


USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$1,855.72

Features: The Power Infuser® is the first portable electronic infusion pump designed explicitly for crystalloid and colloid IV fluid management. Small, durable, and easy to use; it can be used at the scene of an accident, during transport, or in the hospital.

Controlled Delivery Improve adherence to protocols; ensure adequate, but not excessive, hydration, whether restoring intravascular volume during circulatory compromise or rapidly infusing a bolus during hemodynamic assessment, the Power Infuser allows unprecedented control of fluid administration. Adjust flow rates from 0.2 to 6 liters per hour or activate the automated 250cc bolus feature.

Occlusion Detection Don't let a blown IV site or kinked line go unnoticed. With a unique downstream occlusion sensor, the Power Infuser responds to excessive resistance in the fluid path by switching to standby and activating an alarm. Head off complications that could arise from an interruption in flow.

Patient Management Provide life-saving fluid resuscitation when a lack of personnel or room to elevate the bag impedes treatment. Avoid accidental infusion of air with unique membranes built into each crystalloid/colloid pump cartridge. This device is valuable when battlefield injuries occur, during mass casualty events or for critical care transport.

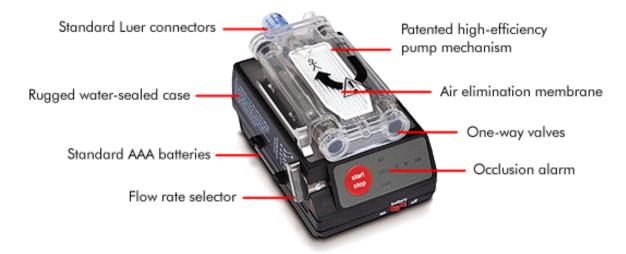

	Part Number	Description	Unit
	0040-0013	Power Infuser® model M100B-3A. Includes bolus setting and uses standard AAA batteries.	each
	0040-0050	Crystalloid/colloid pump cartridges for the Power Infuser. Includes 18in pump-to-patient tubing set. Sterile, single-use only.	box of 10
Ø	0040-0040	AC/DC power adapter for the Power Infuser. Wall-mounted, US-type 120VAC plug.	each
F	0040-0070	IV pole clamp for the Power Infuser. Includes IV bag holder and adjusts for horizontal or vertical mounting.	each

IV PUMP START-UP

NSN	NOTES	Nomenclature	QT Y	UI	PART#	Total Price	Total Price	MFG	Shelf Life, months	Refri g Y/N	CONU S Ship Time, weeks
INSIN	NOTES	Nomenciature	1	10/	FARI#	File	File	MIN	monuis	1/11	Weeks
6515014661488		Cartridge Pump Sterile Crystalloid	02	BX/ PG		\$295.00	\$590.00	Infusion Dynamics	indef	N	2
6515014709907	Included W/NSN	- · · I	01	EA	0040-0070	\$75.00	\$75.00	Infusion Dynamics	Indef	N	2
6515014661481	Included W/NSN	Power Adapter 120 volt AC Wall Mount	01	EA	0040-0040	\$45.00	\$45.00	Infusion Dynamics	Indef	N	2
6515014981114	Included W/NSN	Batteries Alkaline SZ AAA, 6S	01	PG	0040-007	\$4.07	\$4.07	Infusion Dynamics.	Indef	N	2

IV PUMP CONSUMABLES RESUPPLY

NSN	Nomenclature	QT Y	UI	PART#	Total Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515014661488	Cartridge Pump Sterile Crystalloid		10/ BX	0040-0050	\$295.00	\$590.00	Infusion Dynamics.	Indef	N	2
6515014981114	Batteries Alkaline SZ AAA, 6S	01		0040-007	\$4.07	\$4.07	Infusion Dynamics	Indef	N	2

REFRIGERATOR, SOLID-STATE, BIOLOGICALS

THERMOPOL INC. MODEL # M-30TR

Manufacturer's PHONE: (312) 666-9966 FAX (312) 312 666-9977

AAC "W" ITEM NSN 4110-01-388-9220 AAC "J" ITEM NSN 4110-01-451-2356

UA's: 0267, 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$6,000.00

System Description: Portable, solid-state with no moving parts. Cooling by thermoelectric technology, equipped with a solid-state, 7 day, chart recorder. 110/220 VAC or 12/24/48 volt DC. Comes with removable basket, two carrying handles, audible and visual alarm signal with rechargeable battery backup. Accommodates a minimum of 35 whole blood units of 450 ml each or 50 packed red blood cell units of 270 ml each.





THERMOPOL SOLID-STATE BLOOD AND VACCINE REFRIGERATOR

Dimensions	Height, in.	18
	Width, in.	26
	Depth, in.	17
Weight, lbs.	45	
Power	50 Watts	
Interior size	1.0 cubic feet	
Operating	Maintains 1° to 6 ° C	
Temperature	34° to 46° F	
Power Requirements	110/220 VAC and 12/24/28VDC	
	50 WATTS	

SOLID-STATE REFRIGERATOR CONSUMABLES

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
7530014352607	Included W/NSN	Chart, recording instrument	P2415		50 EA	\$75.00	\$75.00	Thermopol	Indef	N	2
6130013873152	Included W/NSN	Power unit with cord 115/230	A-2160-3	1	EA	\$1372.00	\$1372.00	Thermopol	Indef	N	2
6145013878463	Included W/NSN	DC Power Cord	A-2089	1	EA	\$146.00	\$146.00	Thermopol	Indef	N	2
6130 015224916	Included W/NSN	Battery Pack	A-2321	1	EA	\$314.00	\$314.00	Thermopol	Indef	N	2

SUCTION APPARATUS, OROPHARYNGEAL TRACHEAL

TOC

IMPACT INSTRUMENTATION INC, MODEL # 325M

Manufacturer's PHONE: (973) 882-1212, FAX: (973) 882-4993

Website: http://www.impactii.com

AAC "W" ITEM NSN 6515-01-284-8704 AAC "J" ITEM NSN 6515-01-435-5350

UA's:, 0249, 0256, 0257, 0259, 0261, 0264, 0267, 2249, 2256, 2257, 2259, 2261, 2264, 2267, 3256, 3264

USAMMA POC: Equipment Acquisition Division, (301) 619-4060,DSN 343-4060

UNIT PRICE: \$782.20



PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	10"
	Width	13.5"
	Depth	6 1/8"
Weight		5.9kg\13lbs
Operating		
Temperature		-76°F to 140°F
Humidity		
Power		115/230VAC /50/60/400HZ 12VDC
Requirements		100 WATTS

IMPACT 325M ACCESSORIES/CONSUMABLES START-UP

NSN	Included w NSN	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refri g Y/N
6515014065005	Included w/ NSN	Hydrophobic/Bacteriostatic Filter	465-0006-05	1	5 PG	\$41.50	\$41.50	Impact Instruments	INDEF	N
6530 015193021	Included w/ NSN	AC Charger	810-0001-00	1	EA	\$43.20	\$43.20	Impact Instruments	INDEF	N
6530 015193105	Included w/ NSN	DC Cable	708-0001-00	1	EA	\$8.10	\$8.10	Impact Instruments	INDEF	N
6530 015193019	Included w/ NSN	Disposable Collection Jar	410-0008-25	1	25 PG	\$162.00	\$162.00	Impact Instruments	INDEF	N
4720014061637	Included w/ NSN	Tubing 3/8 in. ID x 9/16 in. OD x 9 in.	540-0022-00	6	EA	\$0.41	\$2.46	Impact Instruments	INDEF	N
6515013122835	Included w/ NSN	Assembly Collection Jar	703-0305-11	1	EA	\$21.60	\$21.60	Impact Instruments	INDEF	N
6210012284407	Included w/ NSN	Spare Bulb	068-0004-00	3	EA	\$1.46	\$4.38	Impact Instruments	INDEF	N
6545 015192420	Included w/ NSN	Case	402-0305-31	1	EA	\$40.00	\$40.00	Impact Instruments	INDEF	N
6530014488433	Included w/ NSN	Rinse Bottle	820-0024-00	1	EA	\$4.61	\$4.61	Impact Instruments	INDEF	N
6515015117035	Included w/ NSN	Tube Suction Surg 72" Larg Plas Ster	820-0018-00	1	EA	\$2.70	\$2.70	Impact Instruments	INDEF	N
7610015189210	Included w/ NSN	Operating/Instruction Manual	906-0325-02	2	EA	FREE	FREE	Impact Instruments	INDEF	N

IMPACT 325M CONSUMABLES RESUPPLY

						Total		Shelf Life.	Refr ig	CONUS Ship Time,
NSN	Nomenclature	PN	QTY	UI	Unit Price	Price	MFG	months		weeks
		068-0004-					Impact			
6210012284407	Spare Bulb	00	1	EA	\$1.46	\$1.46	Instruments	indef	N	2
		465-0006-			0.44.50		Impact			•
	Hydrophobic/Bacteriostatic Filter	05	1	5 PG	\$41.50	\$41.50	Instruments	indef	N	2
4520014061625	TH: 2/0: ID 0/16: OD 0:	540-0022-			DO 41	#2.46	Impact			2
4720014061637	Tubing 3/8 in. ID x 9/16 in. OD x 9 in.	00	6	EA	\$0.41	\$2.46	Instruments	indef	N	2
6530 015193019	Dismosoble Collection Ion	410-0008- 25	1	25 DC	\$162.00	\$162.00	Impact Instruments	indef	N	2
0330 013193019	Disposable Collection Jar	820-0018-	1	23 PG	\$102.00	\$102.00		maei	IN	
6515015117035	Tube Suction Surg 72" Larg Plas Ster	00	1	EA	\$2.70	\$2.70	Impact Instruments	indef	N	2
0313013117033	CANNULA SUCT SURG ADSON DESIGN	00	1	LA	φ2.70	\$2.70	Baxter	muei	11	
6515011397576	11FR 15.5CM LG BLUNT OPEN TIP CRS	NL-1930	1	EA	\$44.25	\$44.25	Healthcare	Indef	N	2
0313011377370	TUBE SUCTION SURGICAL YANKAUER	8888-	-	50s\	φ11.23	φ11.23	ricarineare	maci	- 1	
6515011470203	72"LG C9 STR SUMP TIP STERILE 50S	501635	1	1	\$65.88	\$65.88	SHERWOOD	indef	N	2
	CANISTER ASSY SUCT SURG 1500CC			100s	7 00 10 0					
6515011067648	CAP BUILT-IN FLTR SNAP-ON LID100S	65651-515	1		\$186.17	\$186.17	BAXTER	indef	N	2
	CANISTER OUTER SUCTION SURGICAL									
6515013563892	1500ML PLAS STERILIZABLE DISP	65652-551	1	EA	\$6.14	\$6.14	BAXTER	indef	N	2
	TUBE SUCTION SURG ADSON DESIGN						CODMAN			
6515011646288	CURVED 7.50" LG 15FR REUSABLE CRS	70-1148	1	EA	\$137.55	\$137.55	&SHURT	indef	N	2
	TUBE NASOGASTRIC SUMP MARKED			50s			CARDINAL			
6515009171912	AT 18,22,26,30" DBL LUMEN W/FUN 50S	88-264986	1	PG	\$113.00	\$113.00	HEALTH	indef	N	2
	CANNULA LARYNGEAL ANGULAR									
	YANKAUER 9"LG 0.234-0.266" DIA						SKLAR			
6515003867600	BRASS	071801SS	1	EA	\$21.80	\$21.80	CORP.	indef	N	2
	CANNULA ABDOMINAL POOLE 23FR						MILTEX			
6515003866600	8.75" LG FENESTRATED CURVED HUB	10-310	1	EA	\$18.34	\$18.34	INSTRUM.	indef	N	2
	CANNULA LARYNGEAL YANKAUER			50.1						
6515010747812	DSGN W/O CONT VENT STR DISTAL END 50S	3487	1	50s∖ PG	\$34.99	\$34.99	DAVOL INC.	indof	N	2
0313010747812	END 303	348/	1	PG	\$34.99	\$34.99	DA VOL INC.	indef	IN	

THERMOMETER, TYMPANIC

ALARIS MEDICAL MODEL 2090

Manufacturer's Phone: (858) 458-6003 FAX:(858) 458-7507 Website: http://www.alarismed.com/products/monitoring.shtml

AAC"L" ITEM NSN 6515-01-440-5976

UA's: 2267,

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$421.00

System Description: The CORE-CHECK® Tympanic Thermometer System package includes thermometer unit with backlight, temperature indicator light, one 9-volt battery, probe cover dispenser, mountable home base security system, and probe cover sleeve holder.



ALARIS 2090 PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions, in.	Height	2.5"
	Width	16.0"
	Depth	9"
Weight	8oz	
Operating Temperature	60° to 110°F	
Storage	-32° to 140°F	
Temperature		
Humidity	15 to 90 % non	
	condensing	
Power Requirements	9 volt alkaline	

ALARIS 2090 CONSUMABLES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONU S Ship Time, weeks
		022					NETEX			
6135009735632	Battery 9 volt	6	1	EA	\$12.48	\$12.48	SALES		N	2
6515013479447	Cover, Thermometer Probe Disposable	P90	1	5000 PG	\$277.99		Alaris Medical		N	2

SONOSITE, INC MODEL 180Plus

Manufacturer's PHONE: (425) 951-1243 FAX (801) 751-1135 Website: http://www.sonosite.com/products_overview.html

AAC "W" ITEM NSN 6525-01-507-0073 AAC "J" ITEM NSN 6525-01-503-7182

UA's: 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 PRICE: 36,462.98

System Description: Lightweight portable diagnostic ultrasound device used to assist in the detection of Rapid triage and assessment of trauma (FAST), visualization of abdominal fluid collection, evaluation of pericardial or pleural effusions and tamponade, immediate assessment of pelvic pain and abnormal uterine bleeding, rapid evaluation of acute abdominal pain (kidney, cholelithiasis), and easy emergency obstetric exams (IUP, fetal viability)

Operator Familiarization: CD-ROM is available.

CLINICAL APPLICATIONS

Abdominal

Vascular

Breast

Obstetrical

Pediatric/Neonatal

Intraoperative Procedures

Interventional Procedures

Cardiac

Prostate

Small Parts

Gynecological

Musculoskeletal



ULTRASOUND PHYSICAL AND ENVIRONMENTAL SPECIFICATION

Dimensions	Height	13.3 inches
	Width	7.6 inches
	Depth	2.5 inches
	Cube	0.14cuft
Weight		5.4 lbs
Power Requirements		12 VDC or 120 VAC
Battery Life		1.5hrs – 4.0hrs fully charged
Battery characteristics		Lithium Ion

ULTRASOUND CONSUMABLES AND ACCESSORIES

Package Order for FST only

Hand-Carried Ultrasound Systems:		PART NO.	PRICE	QT Y
Transducers (C1 products):	NOTE: Transducers on this price list have the current version software and the existing customer system may require an update to ensure transducer compatibility.			
SonoSite 180 PLUS & ELITE Fourth Generation (1.99)	Portable ultrasound system includes: display module, 2D Grayscale, color power Doppler (CPD) and directional color power Doppler (DCPD) capability, M-mode, PC Direct connectivity capability (w/ SiteLink & PC Direct Serial Cable ordered separately). Also includes battery, universal AC power supply, external video and printer cables, ultrasound gel, and user guides.			
	180PLUS Does not support Continuous Wave (CW) Doppler.	L02464	\$8036.00	1
C15 e / 4–2, micro- curved array transducer	15–mm, broadband (4 - 2 MHz) micro-curved array for thoracic and abdominal applications. Provides 2D Grayscale, CPD or DCPD (depending on exam type), CW, PW, M-mode, and ERH. 5.5 ft (1.7m) cable and pinless connector. Not compatible with non-1.99 systems.	P02461	\$8610.00	1

C60 / 5–2, curved array transducer	60-mm, broadband (5 - 2 MHz) curved array for abdominal, obstetric, and gynecologic applications. Provides 2D Grayscale, CPD, DCPD, PW, M-mode, and THI. 5 ft (1.5 m) cable and pinless connector. Compatible with biopsy guide part number P01882. Some early first generation SonoSite systems (1.5X with ARM < 02.80.006.014) require system software upgrade module (no charge) to ensure compatibility. Contact SonoSite Customer Support prior to ordering for additional details.	P02115	\$4510.00	1
L38 / 10-5, linear array transducer	38-mm, broadband (10 - 5MHz) linear array for breast, small parts, vascular, and musculoskeletal applications. Provides 2D Grayscale, CPD, PW, and M-mode. 5.5 ft. (1.7 m) cable and pinless connector. Compatible with biopsy guide part number P01300. Not compatible with 1 st generation systems.	P01910	\$8610.00	1
ICT / 7–4, intracavitary array transducer	11-mm, broadband (7 - 4 MHz) intracavitary array for gynecologic, obstetric and urologic applications. Provides 2D Grayscale, CPD, PW, and M-mode. 5 ft (1.5m) cable and pinless connector. Compatible with biopsy guide part number P01869. Not compatible with 1 st generation systems.	P02450	\$4510.00	1
Extra Battery – PLUS/ELITE	11.1 volt, 3.0 amp-hour rechargeable lithium-ion battery.	P00049	\$324	1
SiteCharge® dual battery charger	Desktop charger used to recharge two system batteries at a time. Recommended for heavy battery use environments.	L00552	\$492	
Sonosite Military Hard Case		P03808 -01	\$656.00	

User Guides

User Guides			
(One incl. with system	SonoSite Ultrasound System User Guide, English		
order)	(non-PLUS Systems)	P00719-05	\$35
	SonoSite Ultrasound System User Guide		
	Supplement (non-PLUS)	P01770-02	\$0
	SonoSite Ultrasound System User Guide, English		
	(1.9 PLUS Systems)	P01989-01	\$35
	SonoSite Ultrasound System User Guide, English		
	(1.99 PLUS & ELITE)	P02614-01	\$35

Education and Training

OnSite™ Education Ultrasound Skills Train	OnSite Ultrasound Skills Training is focused on delivering highly personalized training for ultrasound image acquisition using the SonoSite hand-carried ultrasound systems. OnSite training is conducted at the customer's medical facility and is delivered by one of SonoSite's highly experienced, Registered Diagnostic Medical Sonographers (RDMS) and follows a prescribed protocol for instruction and learning. Training is available for the following subjects: Focused Echocardiography Level I Obstetrical Scanning Routine Pelvic Transvaginal Scanning Emergency Medicine Applications FAST (Focused Abdominal Sonography for Trauma) Scanning Basic Abdominal Imaging OnSite Ultrasound Skills Training, 1-5 students OnSite Ultrasound Skills Training, additional student over	P01165 P02615 P02343	\$2,500 /Day \$4,000 /Day \$300/				
	10 Note: P02343 must be used in conjunction with P02615		Each				
Education Materials	D : Ol : : I III	D00706	Φ200				
Educational Videos	Basic Obstetrical Ultrasound Examination, Hobbins – NTSC	P00726- 02	\$200				
CME Accredited	Gynecologic Ultrasound Examination, Parsons – NTSC	P00727- 02	\$200				
	Ultrasound Applications in Labor and Delivery, Hobbins – NTSC	P00760- 02	\$200				
	Abdominal Ultrasound Examination, Taylor – NTSC	P00728- 02	\$200				
	Ultrasound in Diagnosis of Abnormal Uterine Bleeding, Parsons - NTSC	P00730- 02	\$200				
Educational CD-ROMs	Educational CD-ROMs Image Based Gynecology (Parsons/Londono)						
CME Accredited	Clinical Applications of Color Power Doppler (DeVore et. al.)	P00732 P00729	\$175 \$175				
	P00731	\$175					
Educational Books	The Echocardiographer's Pocket Reference – Reynolds	P01046	\$40				
CME Accredited CD's	Clinical Practice of Focused Echo DeMaria and Kimura	P01056	\$175				

	Case Studies in Focused Echocardiography – ACC	P01057	\$175
	EchoExplorer: Basic Visual Tutorial for Echocardiography	P01686	\$198
	(Redel/ Hoffman: TomTec Imaging Systems)		
Imported Education	SonoSite offers customers the opportunity to bundle		
Courses	educational courses with ultrasound systems. These courses		
	are provided by third party organizations and are taught at the		
	customer site by physicians experienced in ultrasound. All		
	course expenses, including instructor travel, are included in the		
	price. These courses offer participants the ability to receive		
	CME credits.		
Emergency Ultrasound	2-3 day course covering all aspects of emergency ultrasound:		
Course	ultrasound physics, abdominal ultrasound, emergency, cardiac		
	trauma obstetrics and gynecology, and program		
	implementation. Includes lecture and hands-on scanning.		
	Windy City Ultrasound:		
	(1 – 8 Students)	P01556-	\$7,700
		01	47,700
	(9 – 15 Students)	P01557-	\$9,900
		01	
	South Carolina College of Emergency Physicians:		
	(1-8 Students)	P01558-	\$6,500
		01	
	(9 – 15 Students)	P01559-	\$9,400
		01	
	Additional student over 15	P02760-	\$500/
		01	Ea
Trauma Ultrasound	One-day course on trauma ultrasound. Covers basics of		
Course	Focused Abdominal Sonography for Trauma, incl. hands-on		
(FAST Exam)	scanning.		
	Windy City Ultrasound:		
	(1-8 Students)	P01552-	\$5,200
		01	
	(9 – 15 Students)	P01553-	\$6,700
		01	
	South Carolina College of Emergency Physicians:	D01554	¢4.200
	(1-8 Students)	P01554-	\$4,300
		01	
	(0 15 Students)	DO1555	\$5,200
	(9 – 15 Students)	P01555- 01	\$5,200
	Additional student over 15	P02761-	\$200/
	Additional student over 15	01	\$300/ Each
		UI	Eacii

180 PLUS RESUPPLY CONSUMABLES

NSN	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
6515015046163		610- 214		50 PG	\$156.00		Civco Medical Instruments		Ν	

3.5 x 20cm Latex Covers

These latex transducer covers are individually packaged with colored elastic bands in easy-to-open perforated bags. Conveniently packaged in a compact box, the covers offer an effective means to protect equipment, patients and professionals from the risks of cross-contamination.

Ref.#	Product Description	Qty.
610-214	Sterile 3.5 \times 20cm (1.4" \times 7.9") latex cover	50
610-010	Non-sterile 3.5 \times 20cm (1.4" \times 7.9") latex cover	50



180 PLUS ACCESSORY START-UP

NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
		C15 e / 4–2, micro-curved									
6525-01-502-3728	Included W/NSN	array transducer	P02461	1	EΑ	\$8610.00	\$8610.00	SONOSITE	N	N	2
6525-01-502-3739		C60 / 5–2, curved array transducer	P02115	1	ΕA	\$4510.00	\$4510.00	SONOSITE	N	N	2
6525-01-503-6742		L38 / 10-5, linear array transducer	P01910	1	ΕA	\$8610.00	\$8610.00	SONOSITE	N	N	2
6525-01-502-3739		ICT / 7–4, intracavitary array transducer	P02115	1	ΕA	\$4510.00	\$4510.00	SONOSITE	N	N	2
6525-01-498-3603		Extra Battery – PLUS/ELITE	P00049	1	EΑ	\$324.00	\$324.00	SONOSITE	N	N	2
6130- 0-1490-2678	Included W/NSN	SiteCharge® dual battery charger	L00552	1	ΕA	\$492.00	\$492.00	SONOSITE	N	N	2
6515015219530	ncluded W/NSN	-	P03808- 01		ΕA	\$656.00	\$656.00	SONOSITE	N	N	2



SONOSITE SYSTEM IN HARD CASE

A full line of broadband transducers

SonoSite manufactures a variety of high-quality broadband transducers. They are lightweight, ergonomically designed for optimal user comfort, rugged and feature rapid, pinless connectors.



L38/10-5 38-mm broadband linear array

Clinical Applications

- Small parts imaging: thyroid, testicular, and musculoskeletal
- Breast
- Vascular

Ultrasound guided procedures:

Line placements, biopsies, drainage procedures

Imaging Modes:

2D, M-mode, Color Power Doppler, Pulsed Wave Doppler (option)

Physical Characteristics

Frequency: broadband 10-5 MHz

Maximum Depth: 7 cm

Maximum Field of View: 38 mm

Aperture: 38 mm

Biopsy guide:

for 14-23 gauge needles with depth range from 0.7-3.4 cm

C15/4-2 15-mm broadband array transducer

Clinical Applications

- Adult cardiac
- General-purpose abdominal
- Trauma Assessment (F.A.S.T. exam)
- General Imaging: abdominal and thoracic



Imaging Modes:

2D, M-mode, Color Power Doppler, PowerMap Directional Color Power Doppler in cardiac settings, Pulsed Wave Doppler (option), Tissue Harmonic Imaging (option)

Physical Characteristics

Frequency: broadband 4-2 MHz Maximum Depth: 24.6 cm Maximum Field of View: 101°

C60/5-2 60-mm broadband curved array

Clinical Applications

- General-purpose abdominal
- Obstetric
- Gynecologic

Imaging Modes:

2D, M-mode, Color Power Doppler, PowerMap Directional Color Power Doppler, Pulsed Wave Doppler (option), Tissue Harmonic Imaging (option)

Physical Characteristics

Frequency: broadband 5-2 MHz Maximum Depth: 22 cm Maximum Field of View: 57°



ICT/7-4 11-mm broadband intercavitary array



Clinical Applications

- Gynecologic
 Obstetric
 Urologic

Ultrasound Guided Procedures:

Tissue sample retreival

Imaging Modes:

2D, M-mode, Color Power Doppler, Pulsed Wave Doppler, Pulsed Wave Doppler (optional)

Physical Characteristics

Frequency: broadband 7-4 MHz Maximum Depth: 10.4 cm Maximum Field of View: 135°

Biopsy Guide:

for 16-18 gauge needles with depth range from 0.5-7.0 cm

VENTILATOR VOLUME PORTABLE

IMPACT INSTRUMENTATION INC MODEL 754M

Manufacturer's PHONE: (973) 882-1212, FAX: (973) 882-4993

Website: http://www.impactii.com

AAC "W" ITEM NSN 6530-01-431-5146 AAC "J" ITEM NSN-- 6530-01-464-0267

UA's: 2257, 2267, M308, M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060

UNIT PRICE: \$10,732.56

Operator Familiarization: CD-ROM is available.




ADVANTAGES

- 1. Interactive Demo/Teaching Mode.
- 2. Operation Accomplished in as few as 3 steps.
- 3. Full altitude compensation.
- 4. Internal PEEP.
- 5. On-board emergency backup ventilator.
- 6. Automatic LCD backup lighting.

754M PORTABLE VENTILATOR SPECIFICATIONS

Dimensions	Height	11.5"	
	Width	8.87"	
	Depth	4.5"	
Weight		13 lbs	
Operating		-13°F-120° F	
Temperature			
Humidity			
Power Requirements	Battery, 6VDC,	115/230VAC=/- 10%,	16-30Volts (DC-DC
	5 Amp Hours	50-400HZ 100 WATTS	Converter), neg
			ground

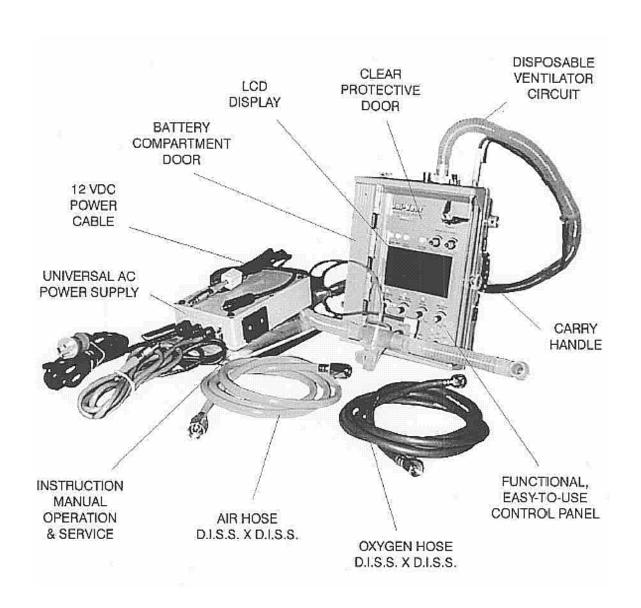

IMPACT 754M ACCESSORY/CONSUMABLES / START-UP

NSN	INCL.W NSN	Nomenclature	OTY	TII	PART#	UNIT PRICE	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
TIOIT	ITCL: W TON	VENTILATOR	QII	01	THE W	RICE	THEC	WI G	months	1/11	WCCRS
6515 01 470 4215		CIRCUIT	01	15 DC	002764	\$46.10	\$46.10	CARDINAL	Indof	N	2
6515-01-470-4215		DISPOSABLE	01	PG	003764		\$40.10	HEALTH	Indef	IN	2
6515-01-504-5417		HCH,ADULT FILTERED BAT/VIRAL	01	25 PG	006005	\$66.82	\$66.82	IMPACT INST	Indef	N	2
6515- 01-518-5060	INCL.W/NSN	OXYGEN RESERVOIR KIT	01	EA	820-097-15	\$189.50	\$189.50	IMPACT INST	Indef	N	2
6515- 01-466-1195	INCL.W/NSN	VENTILATOR CIRCUIT DISPOSABLE/SINGLE PATIENT USE	01	EA	820-0067-15	\$80.00	\$80.00	IMPACT INST	Indef	N	2
4720-01-382-9231	INCL.W/NSN	HIGH PRESSURE OXYGEN HOSE	01	EA	825-0002-00	\$15.28	\$15.28	IMPACT INST	Indef	N	2
6530- 01-519-3018	INCL.W/NSN	HIGH PRESSURE AIR HOSE	01	EA	825-0004-00	\$25.65	\$25.65	IMPACT INST	Indef	N	2
6130-01-468-8360	INCL.W/NSN	UNIVERSAL AC POWER SUPPLY	01	EA	703-0754-09	\$625.50	\$625.50	IMPACT INST	Indef	N	2
6530- 01-519-2814	INCL.W/NSN	12 VDC POWER CABLE	01	EA	703-0754-03	\$123.98	\$123.98	IMPACT INST	Indef	N	2
6545-01-519-0169		CASE, PADDED	01		402-0014-00	\$150.00		IMPACT INST	Indef	N	2
6515-01-509-7331	INCL.W/NSN		02	EA	334-0020-00	\$20.00	\$40.00	IMPACT INST	Indef	N	2
7610-01-518-9213	INCL.W/NSN	MANUAL- OPERATION/ SERVICE	02	EA	906-0754-02	N/C	N/C	IMPACT INST	Indef	N	2
7610- 01-522-0841	INCL.W/NSN	NSTRUCTIONAL VIDEO	01	EA	903-0754-02	\$15.00	\$15.00	IMPACT INST	Indef	N	2
6515-01-521-9530	INCL.W/NSN	HARDENED CASE	01	EA	402-0754-06	\$645.94	\$645.94	IMPACT INST	Indef	N	2

IMPACT 754M COMSUMABLES RESUPPLY

NSN	Nomenclature	QT Y	UI	PART#	Unit Price	Total Price	MFG	Shelf Life, months	Refrig Y/N	CONUS Ship Time, weeks
6515-01-470-4215	VENTILATOR CIRCUIT DISPOSABLE/SINGLE PATIENT USE	3	15 pg	003764	\$46.10	\$138.30	CARDINAL HEALTH	Indef	N	2
6515-01-504-5417	HCH, ADULT FILTERED BACT/VIRAL	2	25pg	003005	\$66.82	\$133.64	IMPACT INST	Indef	N	2
6515- 01-466-1195	VENTILATOR CIRCUIT DISPOSABLE/SINGLE PATIENT USE	1	EA	820-0067-15	\$80.00	\$80.00	IMPACT INST	Indef	N	2

VIEW BOX, RH BLOOD TYPING

EMS AQUISITION CORP MODEL # 71646-10

Manufacturer's Phone: (215) 412-8400 FAX (215) 412-8450

AAC "L" ITEM NSN 6630-01-491-4705

UA's: 2267

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE \$379.00

System Description: Comes with a soft fluorescent, glare-free bulb that provides excellent uniform slide illumination and a temperature indicator that easily and accurately monitors the viewing area and regulates the temperature to compensate for ambient temperature changes (range 45°C to 50°C). Has a built-in temperature indicator for easy and accurate monitoring of the viewing area. An Rh slide can reach a temperature of 37oC to 39oC in two minutes, eliminating heating-up time. The viewing area temperature is easily adjustable to compensate for any ambient temperature of a housing, pivotally supported in a frame. Meets the Rh slide test standards set by the AABB.

Applications:

- 1) Blood typing
- 2) Rh determinations
- 3) Warming slides for Gram's stain
- 4) Tissue typing
- 5) Reading enzyme antibody screens in microplates



RH Blood Typing View Box

RH Blood Typing View Box Physical and Environmental Specifications

Dimensions	Height, in.	4
	Width, in.	13
	Depth, in.	4
Weight, lbs.	4.25	
Power	30 Watts	
Temperature Range	45-50 ° C	
Power Requirements	110 VAC .24 amps 30 Watts	

RH Blood Typing View Box Consumables

	NSN	NOTES	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks
N	NO STK NUMBER	Included W/NSN	Glare-free fluorescent lightbulb	71646-10 bulb	1	EA	\$25.00		EMS Acquisition Corporation	Indef	N	2

Augustine Medical Bair Hugger W/CASE Model 505,

Manufacturers' Phone: (952) 947-1200 FAX (952) 947-1400 Website: http://www.latinhealthgroup.com/warmingUK.htm

AAC "L" ITEM NSN 6530-01-463-6823

UA's: 2267 M301 M308 M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$988.00

System Description: Forced-air warming unit providing safe, quiet and effective warming to patients.

Features: Portable, lightweight, unique snap-fit hose for easy blanket attachment. Easily attaches to an IV pole or bedrail.







BAIR HUGGER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	13"
	Width	10"
	Depth	11"
Weight	11.5 lbs	
Operating Temperature	High 109.4° ± 5.4°F	
	Med 100.4° ± 5.4°F	
	LOW 89.6° \pm 5.4°F	
Air Flow	28 cu ft/min	
Storage Temperature	-40 to+122°F	
Humidty	15 to 90 %	
non-condensing		
Power Requirements	120 VAC/60 Hz	220 VAC/50 Hz
	9.5 amps, 1100 watts	4.5 amps 1000watts

BAIR HUGGER CONSUMABLES RESUPPLY

NSN	Notes	Nomenclature	PN	QTY	UI	Unit Price	Total Price	MFG	Shelf Life, months	Refrig	CONUS Ship Time, weeks	NOTES
6532-01-387-5842	Included W/NSN	Blanket Torso	540	1	10/pg	\$122.98	\$122.98	Augustine Medical		N	2	Optional Item
6532-01-522-4921	Included W/NSN	Blanket Full body surgical	610	1	10/pg	\$103.50	\$103.50	Augustine Medical		N	2	
6532-01-526-5337	Included W/NSN	Blanket Surgical Access	570	1	10/pg	\$102.00	\$102.00	Augustine Medical		N	2	
6532-01-356-4851	OPTIONAL	Blanket lower body	525	1	15/pg	\$146.00	\$146.00	Augustine Medical		N	2	Optional Item
6532-01-388-4182	OPTIONAL	Blanket upper body	522	1	10pg	\$122.88	\$122.88	Augustine Medical		N	2	Optional Item
6515-01-463-6893	Included W/NSN	FILTER	90009	1	EA	\$39.00	\$39.00	Augustine Medical		N	2	

BAIR HUGGER ACCESSORIES PACKAGE

						Unit	Total		Shelf Life,	Refrig	CONUS Ship Time,	
NSN	Notes	Nomenclature	PN	QTY	UI	Price	Price	MFG	months	Y/N	weeks	NOTES
Included w/ NSN	Included W/NSN	HOSE	90003	1	EA	\$63.06	\$63.06	Augustine Medical		N	2	
6515 015242953	Included W/NSN	HOSE CLIP	90017	1	EA	\$3.90	\$3.900	Augustine Medical		N	2	
6515 015242947	Included W/NSN	SHEET CLIP	90063	1	EA	\$5.46	\$5.46	Augustine Medical		N	2	
7610015222841	Included W/NSN	Operator Manual	OPM			N\C	N\C	Augustine Medical		N	2	
7610015222837	Included W/NSN	Service Manual	OSM			N\C	N\C	Augustine Medical		N	2	
6530015237536	Included W/NSN	Hardened Case	505252	1	EA	\$1500.00	\$1500.00	Augustine Medical		N	2	

BLANKET HYPOTHERMIA, CHILLBUSTER

DISTRIBUTOR: MARKETING ASSESSMENT INC. MANUFACTURER: THERMAL GEAR MODEL # SERIES 8000

Distributor's PHONE: (703) 392-9344 FAX (703) 392-3803

Website: http://www.chillbuster.com

ACC "L" ITEM NSN 6515-01-500-6087

UA's: 2267, M309

USAMMA POC: Equipment Acquisition Division, (301) 619-4060, DSN 343-4060 UNIT PRICE: \$1,650.00

The ChillBuster Blanket system is specifically designed to treat hypothermia encountered in the field, and in the pre-hospital, hospital or surgical environments.

Features:1. User set temperature range of 65° to 105°F for controlled warming.

- 2. 1.75-3.5 hours of operation, allowing for extended patient transport.
- 3. Blanket wire heats to 105°F within 60 seconds for rapid thermal response.
- 4. AC/DC converter permits the alternative of line power operation to enhance operating flexibility.
- 5. Optional cigarette lighter adapter allows unlimited blanket operation during transport.
- 6. Optional Blanket covers: sterile, single-use and non-sterile general use

BLANKET PATIENT HYPOTHERMIA, CHILLBUSTER





CHILLBUSTER PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

Dimensions	Height	10.5"	
	Width	1"	
	Depth	18"	
Weight		10 lbs	
Operating Temperature	+14 to 113°F		
Storage Temperature	-40 to+122°F		
Humidity	15 to 90 % non- condensing		
Power Requirements	100/250VAC @47-63 HZ,Single Phase 60	External Power 12 VDC @ 5 amps, neg	Internal Power source rechargeable battery 12VDC 1.75 to 3.5
	watts max	grnd	hours

CONSUMABLES ACCESSORIES STARTUP

NSN	NOTES	Nomenclature	PN	QT Y	UI	Unit Price	Total Price	MFG	Refri g Y/N	CONU S Ship Time, weeks
6515 015224385	Included W/NSN	Blanket – 30 in. x 60 in.	200-9103-01-00E	1	EA	\$300.00	\$300.00	ThermoGear, Inc.	N	2
6515 015221240	Included W/NSN	AC/DC Switching Power Supply	200-9110-02-00E	1	EA	\$225.00	\$225.00	ThermoGear, Inc.	N	2
6515 015221377	Included W/NSN	Carrying Bag	200-9111-01-00E	1	EA	\$135.00	\$135.00	ThermoGear, Inc.	N	2
6515 015221231	Included W/NSN	Cigarette Adapter	200-9116-00-00E	1	EA	\$60.00	\$60.00	ThermoGear, Inc.	N	2
6532014980837	Included W/NSN	Blanket Covers, 25/case 30 in. x 60 in. (must specify size when ordering	200-9112-13-00E	1	EA	\$125.00	\$125.00	ThermoGear, Inc.	N	2
Included w/NSN	Included W/NSN	2 Operators Manuals/CDs			EA	N\C	N\C	ThermoGear, Inc.	N	2
Included w/NSN	Included W/NSN	1 Maintainer Manual/CD		1	EA	N\C	N\C	ThermoGear, Inc.	N	2